





Fijación	Techo
Voltaje (V)	220V-240V
Hercios	50/60Hz
Clase	II
IP	20
Potencia (W)	5
Fuente de luz	COB LED
Fuente de luz incluida	Si
Hilo incandescente	650
Vida útil	50.000h L70 B10
Factor de potencia	0.8
Temperatura de color (K)	2700K
Luminaria regulable en intensidad (W)	No
Grados de apertura	15
Riesgo fotobiológico	1
CRI	90
Sistema de control	On/off
Driver incluido	Si
Corriente de alimentación	500 mA
Material estructura	Aluminio + Aluminio
Acabado estructura	Blanco+Negro
Medida corte empotrar	75
Altura mínima de empotrar (mm)	92
Grosor máximo techo (mm)	25

↓ Instrucciones de instalación

↓ Fotométrica

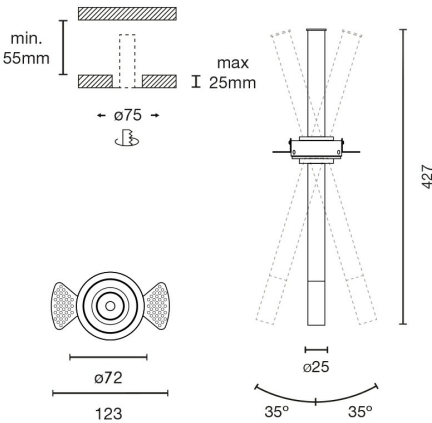

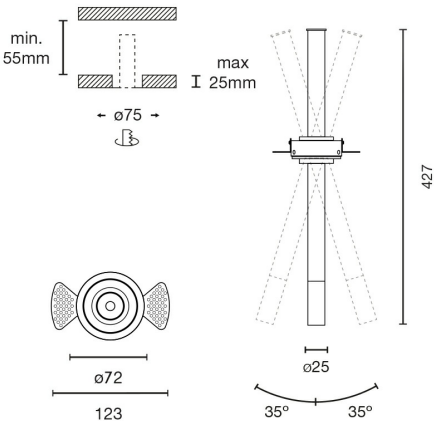


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	2700K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	TRIAC
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	White+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

↓ Installation instructions

↓ Photometric



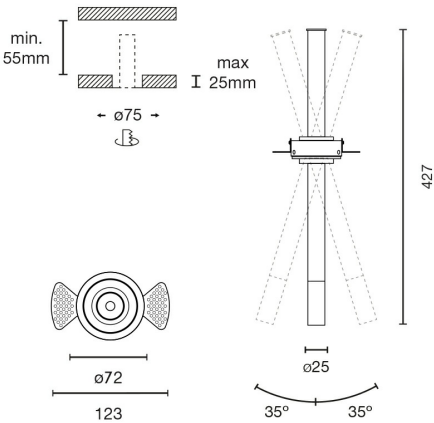

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	2700K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	DALI
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	White+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25


 [Installation instructions](#)

 [Photometric](#)





CASAMBI

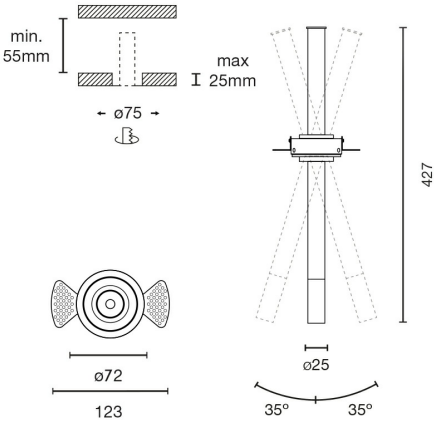


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	2700K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	CASAMBI
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	White+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

Installation instructions

Photometric



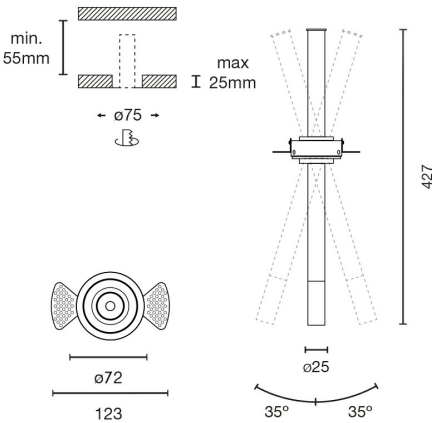


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	2700K
Dimmable luminaire (W)	No
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	On/off
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	Black+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

 [Installation instructions](#)

 [Photometric](#)



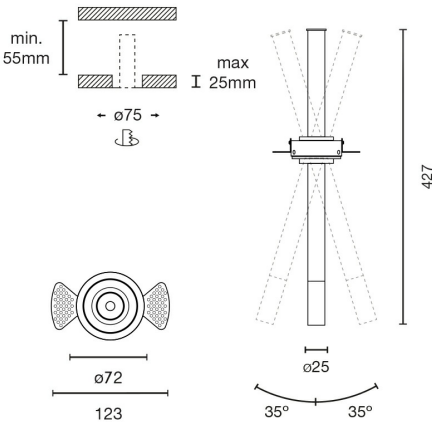


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	2700K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	TRIAC
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	Black+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

 [Installation instructions](#)

 [Photometric](#)



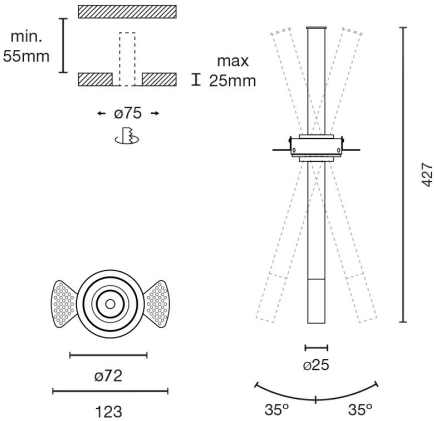

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	2700K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	DALI
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	Black+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25


Installation instructions

Photometric





CASAMBI

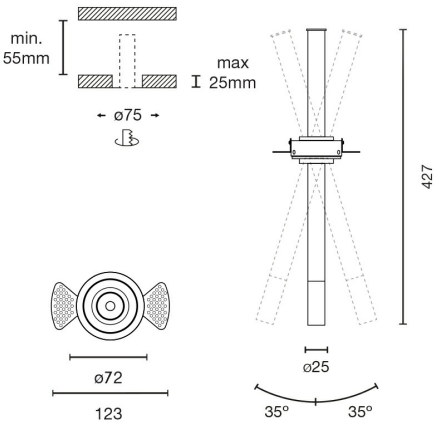


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	2700K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	CASAMBI
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	Black+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

 [Installation instructions](#)

 [Photometric](#)




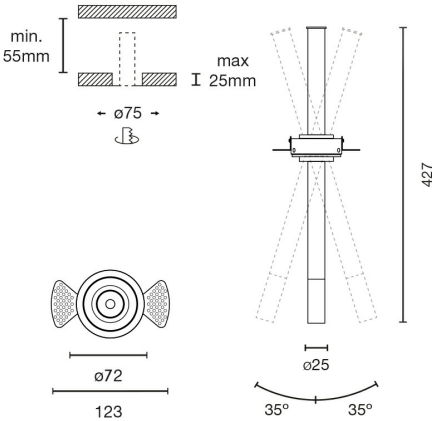

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	3000K
Dimmable luminaire (W)	No
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	On/off
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	White+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

 [Installation instructions](#)

 [Photometric](#)

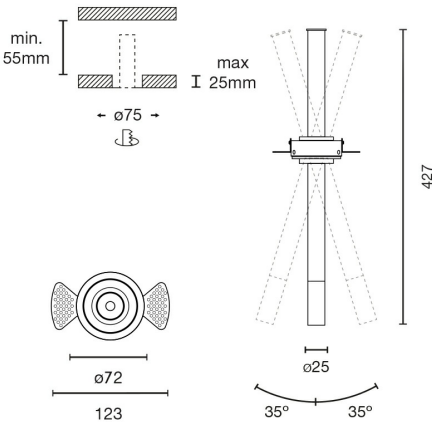


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	3000K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	TRIAC
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	White+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

↓ Installation instructions

↓ Photometric



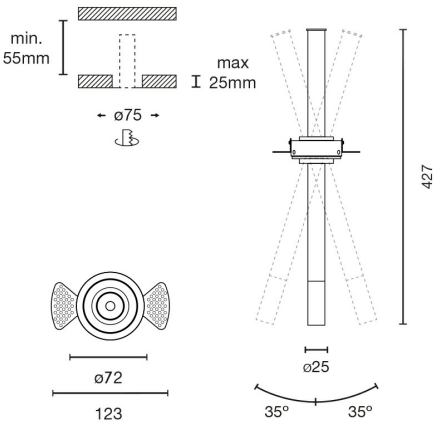

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	3000K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	DALI
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	White+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25


Installation instructions

Photometric





CASAMBI

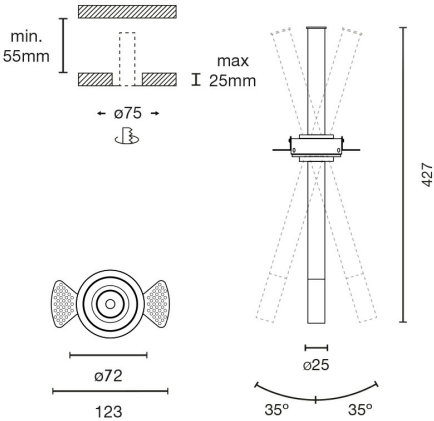


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	3000K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	CASAMBI
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	White+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

Installation instructions

Photometric



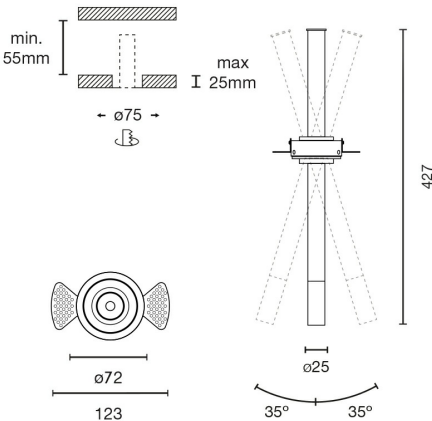


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	3000K
Dimmable luminaire (W)	No
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	On/off
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	Black+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

 [Installation instructions](#)

 [Photometric](#)



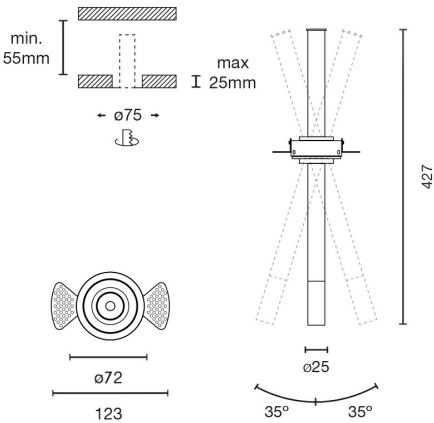


Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	3000K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	TRIAC
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	Black+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

 [Installation instructions](#)

 [Photometric](#)



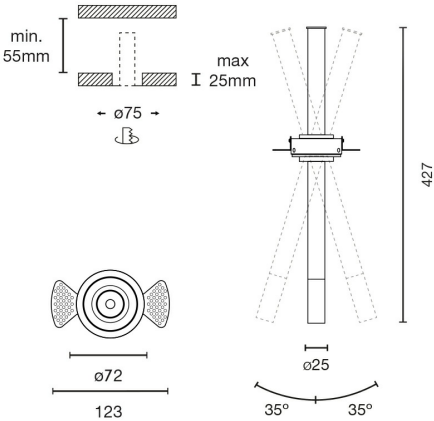

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	3000K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	DALI
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	Black+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25


 [Installation instructions](#)

 [Photometric](#)





CASAMBI

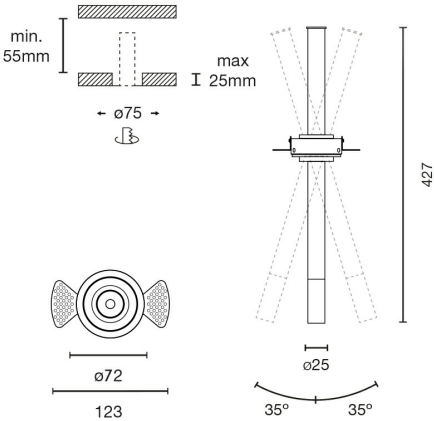

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	5
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Color temperature (K)	3000K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	CASAMBI
Driver included	Yes
Supply current	500 mA
Structure material	Aluminium + Aluminium
Structure finish	Black+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

[Installation instructions](#)

[Photometric](#)



