

# NESO



## TRACKS

Carriles

### RECESSED


Empotrable



1000 | 2000

### SURFACE


Superficie



1000 | 2000

### PENDANT

Colgante



1000 | 2000

## MODULES

Módulos

### Neso Point



84



164




320

### Neso Unik




ø150




ø150

### Neso Line




320




640


### Neso Hole



ø35



ø50



ø70

### Neso Top



ø35

## FINISH

Acabado

● Black  
Negro

○ White  
Blanco

## COLOR TEMPERATURE

Temperatura de color

2700K CRI>90

3000K CRI>90

## CONTROL SYSTEM

Sistema de Control




CASAMBI



Détail Studio | Photo by Julien Chamoux Photographie




TRACK RECESSED

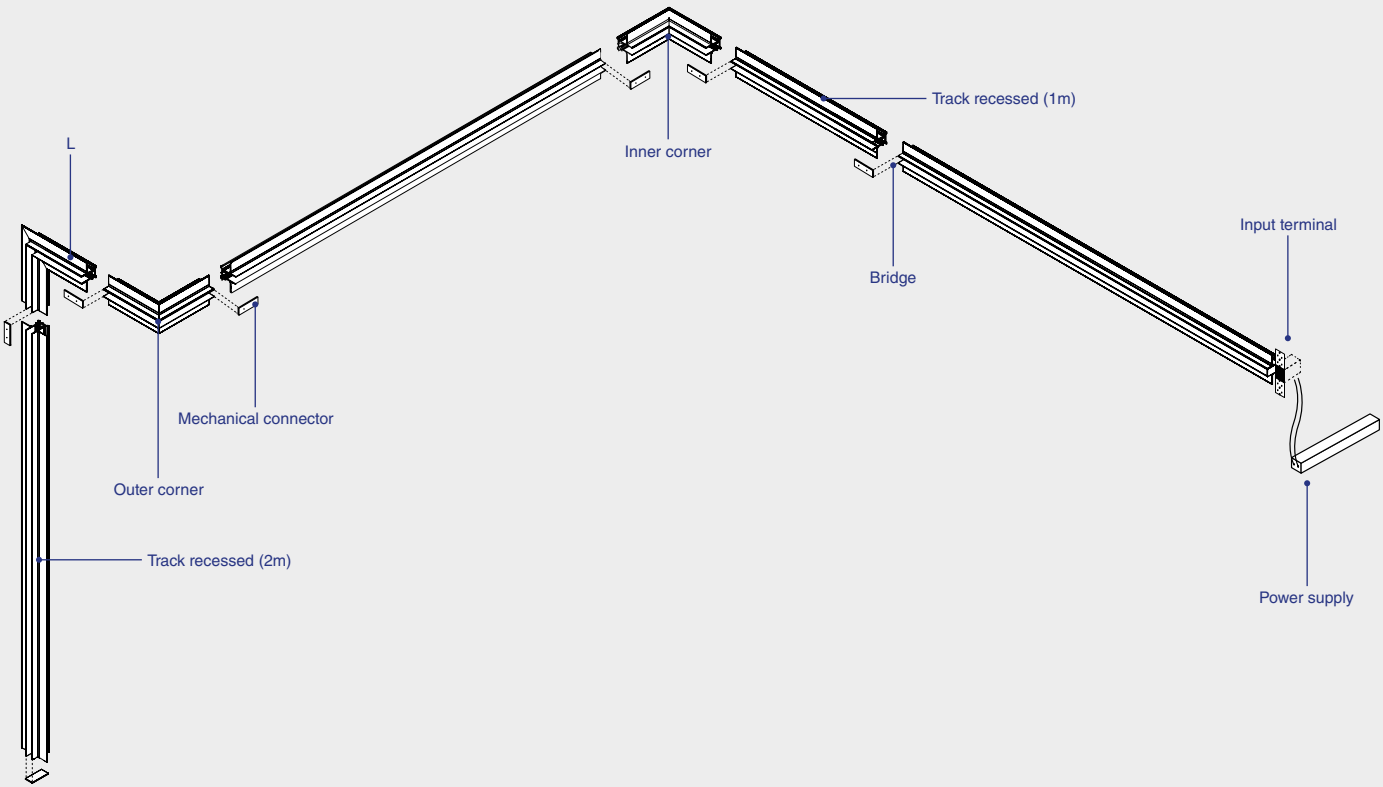


24V

| Family                      | Track Length | Finish  | Control System |
|-----------------------------|--------------|---------|----------------|
| 5020120 Neso Track Recessed | 10 1m        | 1 White | D DALI         |
|                             | 20 2m        | 2 Black | ON/OFF         |

ACCESSORIES NESO




|                               |                      |
|-------------------------------|----------------------|
| ● 5020200102                  | Mechanical connector |
| ● 5020115101 / ● 5020115102   | Bridge               |
| ● 5020115101D / ● 5020115102D | Bridge DALI          |
| ● 5020R120102                 | Track cover          |
| ● 5020R120101                 | Track cover          |
| POWER SUPPLY                  |                      |
| 98324120                      | Power supply 120W    |
| 98324150                      | Power supply 150W    |
| 98324180                      | Power supply 180W    |
| 98324200                      | Power supply 200W    |




|                               |                     |
|-------------------------------|---------------------|
| ● 5020221401 / ● 5020221402   | Input terminal      |
| ● 5020221401D / ● 5020221402D | Input terminal DALI |
| ● 5020221001 / ● 5020221002   | L                   |
| ● 5020221001D / ● 5020221002D | L DALI              |
| ● 5020221101 / ● 5020221102   | T                   |
| ● 5020221101D / ● 5020221102D | T DALI              |
| ● 5020221201 / ● 5020221202   | Inner corner        |
| ● 5020221201D / ● 5020221202D | Inner corner DALI   |
| ● 5020221301 / ● 5020221302   | Outer corner        |
| ● 5020221301D / ● 5020221302D | Outer corner DALI   |

## TRACK SURFACE & SUSPENSION

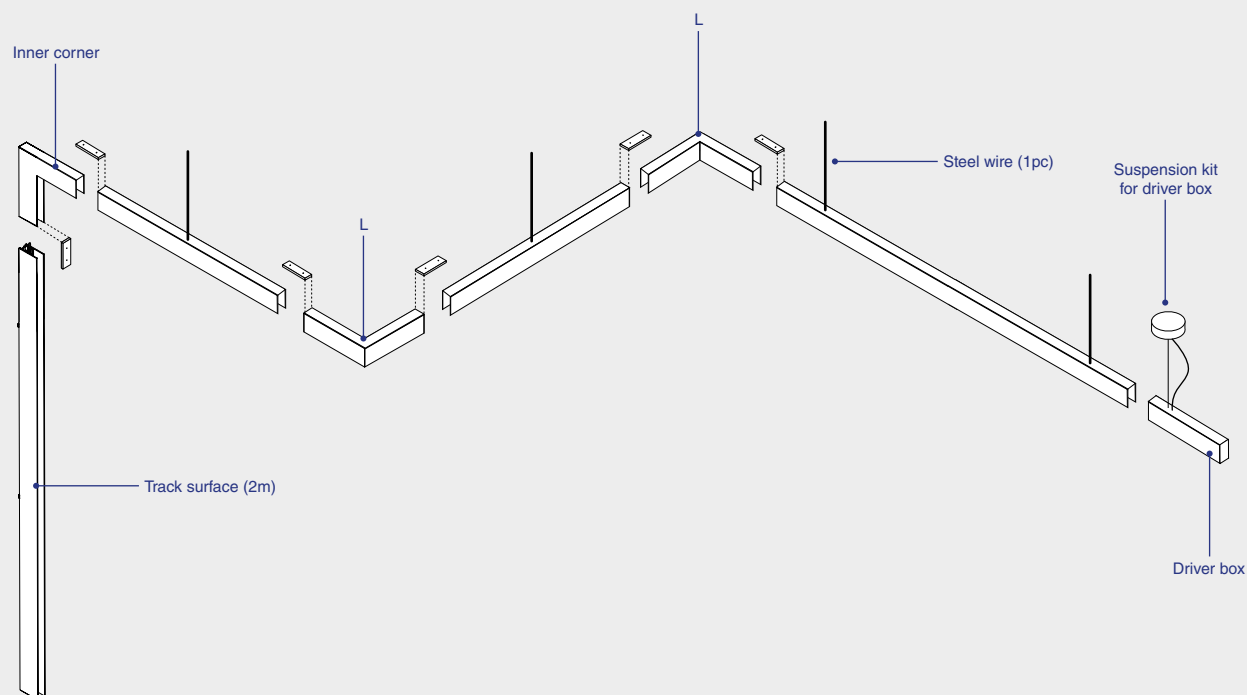


| Family                     | Track Length | Finish  | Control System |
|----------------------------|--------------|---------|----------------|
| 5020110 Neso Track Surface | 10 1m        | 1 White | D  ON/OFF      |
|                            | 20 2m        | 2 Black |                |

## ACCESSORIES NESO



|                               |                      |
|-------------------------------|----------------------|
| ● 5020200102                  | Mechanical connector |
| ● 5020115101 / ● 5020115102   | Bridge               |
| ● 5020115101D / ● 5020115102D | Bridge DALI          |
| ● 5020210001 / ● 5020210002   | Driver box           |
| ● 5020210001D / ● 5020210002D | Driver box DALI      |
| ● 5020210201 / ● 5020210202   | Suspension kit       |
| ● 5020210201D / ● 5020210202D | Suspension kit DALI  |
| 5020210102                    | Steel wire           |
| ● 5020R120102                 | Track cover          |
| ● 5020R120101                 | Track cover          |
| <b>POWER SUPPLY</b>           |                      |
| 98324120                      | Power supply 120W    |
| 98324150                      | Power supply 150W    |
| 98324180                      | Power supply 180W    |
| 98324200                      | Power supply 200W    |




|                               |                     |
|-------------------------------|---------------------|
| ● 5020210301 / ● 5020210302   | Input terminal      |
| ● 5020210301D / ● 5020210302D | Input terminal DALI |
| ● 5020211001 / ● 5020211002   | L                   |
| ● 5020211001D / ● 5020211002D | L DALI              |
| ● 5020211101 / ● 5020211102   | T                   |
| ● 5020211101D / ● 5020211102D | T DALI              |
| ● 5020211201 / ● 5020211202   | Inner corner        |
| ● 5020211201D / ● 5020211202D | Inner corner DALI   |
| ● 5020211301 / ● 5020211302   | Outer corner        |
| ● 5020211301D / ● 5020211302D | Outer corner DALI   |





NESO POINT 3L

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C UGR <16





12°

34°

| Family            | Color T°               | Beam Angle | Finish  |
|-------------------|------------------------|------------|---------|
| 50101 Point 3L 4W | 927 2700K 217lm CRI>90 | 1 12°      | 1 White |
|                   | 930 3000K 292lm CRI>90 | 2 34°      | 2 Black |

NESO POINT 6L

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C UGR <16





12°

34°

| Family            | Color T°               | Beam Angle | Finish  | Control System                |
|-------------------|------------------------|------------|---------|-------------------------------|
| 50102 Point 6L 8W | 927 2700K 480lm CRI>90 | 1 12°      | 1 White | W CASAMBI<br>D DALI<br>ON/OFF |
|                   | 930 3000K 506lm CRI>90 | 2 34°      | 2 Black |                               |

NESO POINT 12L

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C UGR <16



12°



34°

| Family              | Color T°                | Beam Angle | Finish  | Control System                |
|---------------------|-------------------------|------------|---------|-------------------------------|
| 50103 Point 12L 16W | 927 2700K 1102lm CRI>90 | 1 12°      | 1 White | W CASAMBI<br>D DALI<br>ON/OFF |
|                     | 930 3000K 1107lm CRI>90 | 2 34°      | 2 Black |                               |



## NESO LINE 32cm

no incl. 50.000hs L70/B10  MacAdam 3 24V  650°C



32

### Family

### Color T°

### Finish

### Control System

**50104** Line 32cm 13W

**927** 2700K 892lm CRI>90

**930** 3000K 920lm CRI>90

**01** White

**02** Black



**W** CASAMBI

**D** DALI

ON/OFF

## NESO LINE 64cm

no incl. 50.000hs L70/B10  MacAdam 3 24V  650°C



64

### Family

### Color T°

### Finish

### Control System

**50105** Line 64cm 26W

**927** 2700K 1399lm CRI>90

**930** 3000K 1442lm CRI>90

**01** White

**02** Black

**W** CASAMBI



**D** DALI

ON/OFF



NESO HOLE ø3.5cm

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C





20° 40°

| Family | Color T°       | Beam Angle     | Finish             | Control System                |
|--------|----------------|----------------|--------------------|-------------------------------|
| 50107  | Hole ø3,5cm 5W | 1 20°<br>2 40° | 1 White<br>2 Black | W CASAMBI<br>D DALI<br>ON/OFF |

NESO HOLE ø5cm

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C





18° 36°

| Family | Color T°      | Beam Angle     | Finish             | Control System                |
|--------|---------------|----------------|--------------------|-------------------------------|
| 50108  | Hole ø5cm 10W | 1 18°<br>2 36° | 1 White<br>2 Black | W CASAMBI<br>D DALI<br>ON/OFF |

NESO HOLE ø7cm

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C





18° 36°

| Family | Color T°      | Beam Angle     | Finish             | Control System                |
|--------|---------------|----------------|--------------------|-------------------------------|
| 50110  | Hole ø7cm 20W | 1 18°<br>2 36° | 1 White<br>2 Black | W CASAMBI<br>D DALI<br>ON/OFF |



NESO UNIK

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C





325°

| Family        | Color T°                                         | Finish               | Control System                |
|---------------|--------------------------------------------------|----------------------|-------------------------------|
| 50108 Unik 5W | 927 2700K 256lm CRI>90<br>930 3000K 264lm CRI>90 | 01 White<br>02 Black | W CASAMBI<br>D BALI<br>ON/OFF |

NESO UNIK

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C






325°

| Family        | Color T°                                         | Finish               | Control System                |
|---------------|--------------------------------------------------|----------------------|-------------------------------|
| 50109 Unik 5W | 027 2700K 256lm CRI>90<br>030 3000K 264lm CRI>90 | 01 White<br>02 Black | W CASAMBI<br>D BALI<br>ON/OFF |

NESO TOP

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C



20°

40°

| Family       | Color T°                                        | Beam Angle     | Finish             | Control System                |
|--------------|-------------------------------------------------|----------------|--------------------|-------------------------------|
| 50106 Top 5W | 927 2700K 360m CRI>90<br>930 3000K 444lm CRI>90 | 1 20°<br>2 40° | 1 White<br>2 Black | W CASAMBI<br>D BALI<br>ON/OFF |







# NESO SLIM




## TRACKS

Carriles

### RECESSED


Empotrable



1000 | 2000

### SURFACE


Superficie



1000 | 2000

### PENDANT

Colgante



1000 | 2000

## MODULES

Módulos

### Neso Slim

Point



305



388

### Neso Slim


Unik




ø150

### Neso Slim


Line/Wallwasher



305



704




305


N

### Neso Slim

Hole




ø35




ø50

### Neso Slim

Pendants



ø35



ø150




ø32

N



ø40

N



ø72

N

## FINISH

Acabado

● Black  
Negro

## COLOR TEMPERATURE

Temperatura de color

2700K CRI>90

3000K CRI>90



## CONTROL SYSTEM

Sistema de Control



CASAMBI


TRACK RECESSED

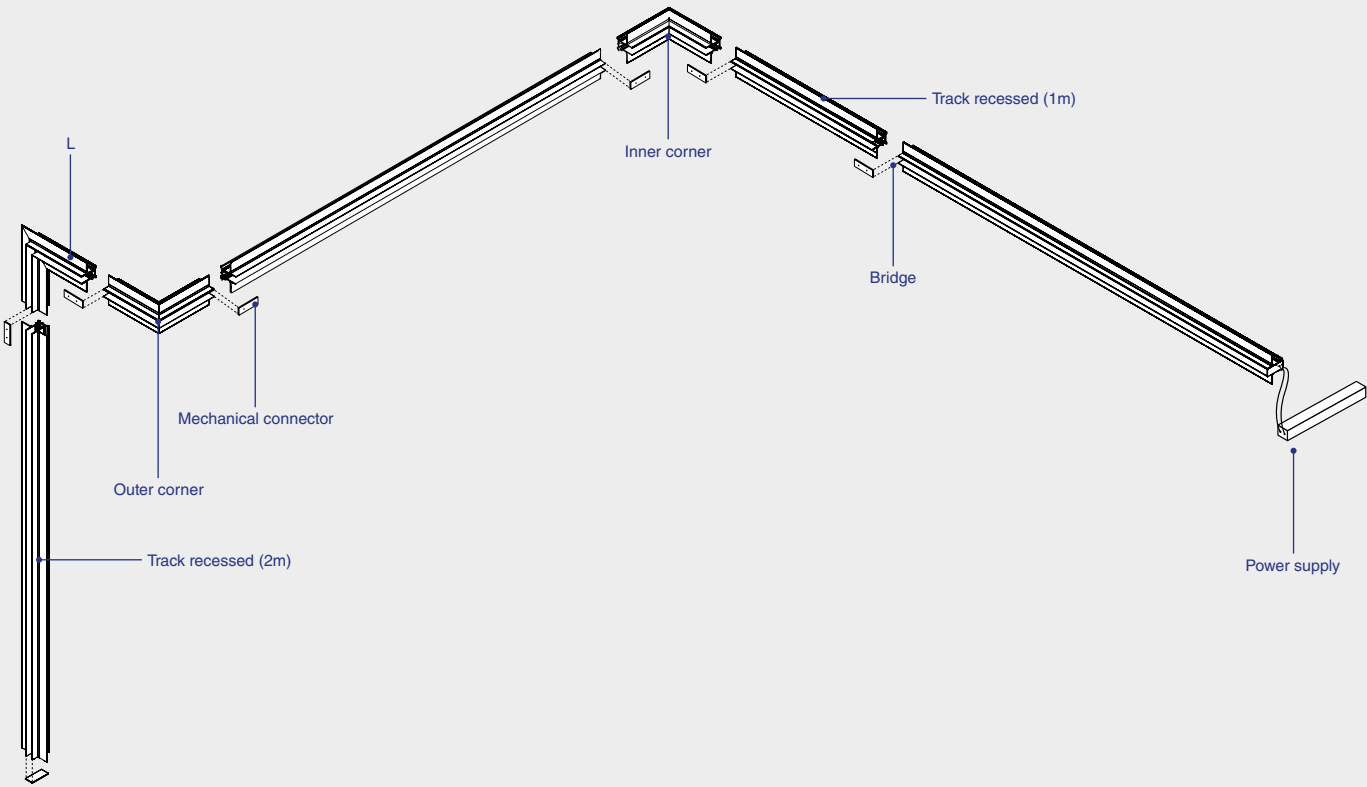


24V

| Family                      | Track Length | Finish  | Control System |
|-----------------------------|--------------|---------|----------------|
| 6020120 Neso Track Recessed | 10 1m        | 2 Black | D DALI         |
|                             | 20 2m        | 2       | ON/OFF         |

ACCESSORIES NESO SLIM





|              |                      |
|--------------|----------------------|
| 6020200102   | Mechanical connector |
| 6020115102   | Bridge               |
| 6020115102D  | Bridge DALI          |
| 6020R120102  | Track cover          |
| POWER SUPPLY |                      |
| 98324120     | Power supply 120W    |
| 98324150     | Power supply 150W    |
| 98324180     | Power supply 180W    |
| 98324200     | Power supply 200W    |



|             |                   |
|-------------|-------------------|
| 6020221002  | L                 |
| 6020221002D | L DALI            |
| 6020221102  | T                 |
| 6020221102D | T DALI            |
| 6020221202  | Inner corner      |
| 6020221202D | Inner corner DALI |
| 6020221302  | Outer corner      |
| 6020221302D | Outer corner DALI |


## TRACK SURFACE & SUSPENSION

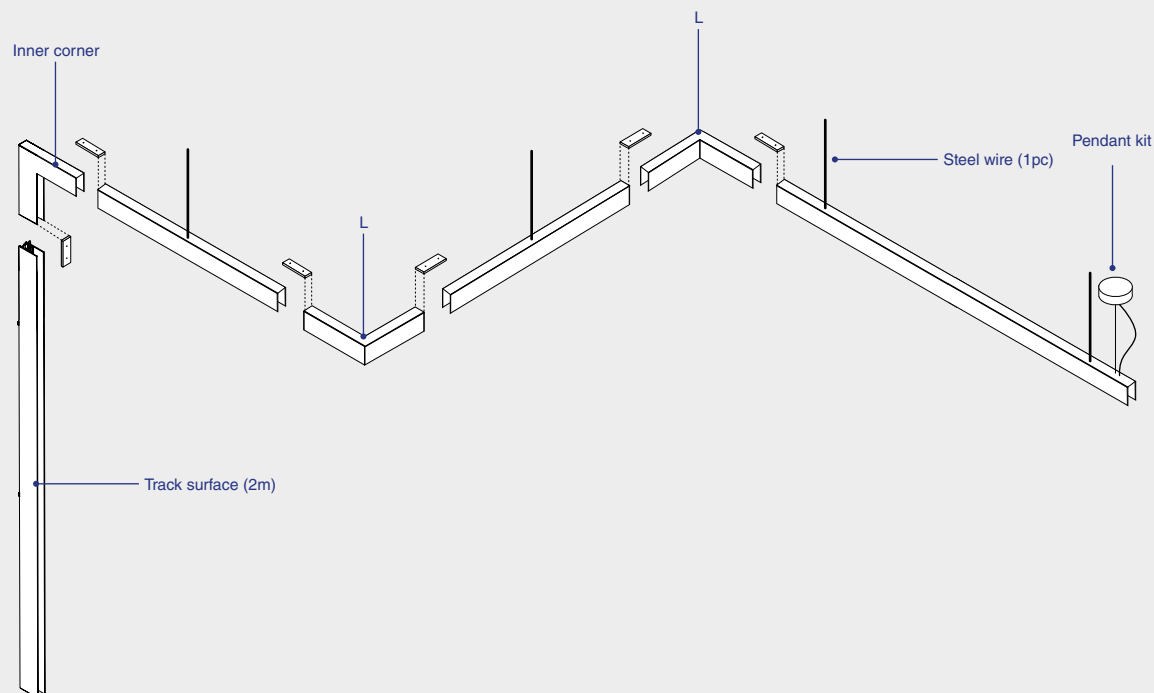


24V

| Family                     | Track Length | Finish  | Control System                                                                          |
|----------------------------|--------------|---------|-----------------------------------------------------------------------------------------|
| 6020110 Neso Track Surface | 10 1m        | 2 Black | D  |
|                            | 20 2m        | 2       | ON/OFF                                                                                  |

## ACCESSORIES NESO SLIM



|                     |                      |
|---------------------|----------------------|
| ● 6020200102        | Mechanical connector |
| ● 6020200103        | Surface mounting Kit |
| ● 6020210202        | Pendant Kit          |
| ● 6020210202D       | Pendant kit DALI     |
| 6020210102          | Steel wire           |
| 6020R120102         | Track cover          |
| <b>POWER SUPPLY</b> |                      |
| 98324120            | Power supply 120W    |
| 98324150            | Power supply 150W    |
| 98324180            | Power supply 180W    |
| 98324200            | Power supply 200W    |



|               |                   |
|---------------|-------------------|
| ● 6020115102  | Bridge            |
| ● 6020115102D | Bridge DALI       |
| ● 6020211002  | L                 |
| ● 6020211002D | L DALI            |
| ● 6020211102  | T                 |
| ● 6020211102D | T DALI            |
| ● 6020211202  | Inner corner      |
| ● 6020211202D | Inner corner DALI |
| ● 6020211302  | Outer corner      |
| ● 6020211302D | Outer corner DALI |

# NESO SLIM POINT 12L

no incl.



50.000hs  
L70/B10

MacAdam  
3

24V

650°C

UGR  
<16



25°

| Family | Color T°           | Beam Angle         | Finish | Control System |
|--------|--------------------|--------------------|--------|----------------|
| 60102  | Point slim 12L 12W | 2700K 816lm CRI>90 | 1      | 25°            |
|        | 927                | 3000K 841lm CRI>90 | 2      | Black          |
|        | 930                |                    |        |                |
|        |                    |                    |        | W CASAMBI      |
|        |                    |                    |        | D DALI         |
|        |                    |                    |        | ON/OFF         |

# NESO SLIM POINT 24L

no incl.


50.000hs  
L70/B10

MacAdam  
3

24V

650°C

UGR  
<16





25°

| Family | Color T°           | Beam Angle          | Finish | Control System |
|--------|--------------------|---------------------|--------|----------------|
| 60103  | Point slim 24L 24W | 2700K 1674lm CRI>90 | 1      | 25°            |
|        | 927                | 3000K 1726lm CRI>90 | 2      | Black          |
|        | 930                |                     |        |                |
|        |                    |                     |        | W CASAMBI      |
|        |                    |                     |        | D DALI         |
|        |                    |                     |        | ON/OFF         |



NESO SLIM LINE 30cm



no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C



| Family                  | Color T°                                         | Finish   | Control System                |
|-------------------------|--------------------------------------------------|----------|-------------------------------|
| 60104 Line slim 30cm 6W | 927 2700K 322lm CRI>90<br>930 3000K 332lm CRI>90 | 02 Black | W CASAMBI<br>D DALI<br>ON/OFF |

NESO SLIM LINE 70cm



no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C



| Family                   | Color T°                                         | Finish   | Control System                |
|--------------------------|--------------------------------------------------|----------|-------------------------------|
| 60105 Line slim 70cm 18W | 927 2700K 875lm CRI>90<br>930 3000K 902lm CRI>90 | 02 Black | W CASAMBI<br>D DALI<br>ON/OFF |

NESO SLIM LINE WALL WASHER 30cm NEW

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C





| Family                             | Color T°                                         | Finish   | Control System                |
|------------------------------------|--------------------------------------------------|----------|-------------------------------|
| 60111 Line slim wallwasher 30cm 6W | 927 2700K 311lm CRI>90<br>930 3000K 320lm CRI>90 | 02 Black | W CASAMBI<br>D DALI<br>ON/OFF |



NESO SLIM HOLE ø3.5cm

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C





20° 40°

| Family | Color T°            | Beam Angle     | Finish  | Control System                |
|--------|---------------------|----------------|---------|-------------------------------|
| 60107  | Hole slim ø3,5cm 5W | 1 20°<br>2 40° | 2 Black | W CASAMBI<br>D DALI<br>ON/OFF |

NESO SLIM HOLE ø5cm

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C





18° 36°

| Family | Color T°           | Beam Angle     | Finish  | Control System                |
|--------|--------------------|----------------|---------|-------------------------------|
| 60108  | Hole slim ø5cm 10W | 1 18°<br>2 36° | 2 Black | W CASAMBI<br>D DALI<br>ON/OFF |



NESO SLIM UNIK

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C





325°

| Family             | Color T°                                         | Finish   | Control System                |
|--------------------|--------------------------------------------------|----------|-------------------------------|
| 60108 Unik slim 5W | 927 2700K 230lm CRI>90<br>930 3000K 237lm CRI>90 | 02 Black | W CASAMBI<br>D DALI<br>ON/OFF |

NESO SLIM UNIK PENDANT

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C





325°

| Family                     | Color T°                                         | Finish   | Control System                |
|----------------------------|--------------------------------------------------|----------|-------------------------------|
| 60109 Unik slim pendant 5W | 027 2700K 230lm CRI>90<br>030 3000K 237lm CRI>90 | 02 Black | W CASAMBI<br>D DALI<br>ON/OFF |

NESO SLIM PENDANT

no incl. 50.000hs L70/B10 MacAdam 3 24V 650°C



20°



40°

| Family                     | Color T°                                        | Beam Angle     | Finish  | Control System                |
|----------------------------|-------------------------------------------------|----------------|---------|-------------------------------|
| 60106 Neso slim pendant 5W | 927 2700K 308m CRI>90<br>930 3000K 320lm CRI>90 | 1 20°<br>2 40° | 2 Black | W CASAMBI<br>D DALI<br>ON/OFF |



NESO SLIM ANNA N

no incl. 50.000hs L70/B10 III MacAdam 3 24V 650°C





15°

| Family                                | Color T°                   | Beam Angle       | Finish              | Control System                                                                                                                                  |
|---------------------------------------|----------------------------|------------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>60110</div> Anna slim pendant 6W | <div>927</div> 2700K CRI90 | <div>1</div> 15° | <div>02</div> Black | <div>W</div> CASA MBI<br><div>D</div> <br><div></div> ON/OFF |

NESO SLIM DIANA N

no incl. 50.000hs L70/B10 III MacAdam 3 24V 650°C




18°

| Family |                   | Color T°        | Beam Angle | Finish   | Control System |
|--------|-------------------|-----------------|------------|----------|----------------|
| 60112  | Diana slim 400 6W | 927 2700K CRI90 | 1 18°      | 02 Black | W CASAMBI      |
| 60113  | Diana slim 600 6W |                 |            |          | D DALI         |
| 60114  | Diana slim 800 6W |                 |            |          | ON/OFF         |

NESO SLIM NINA N

no incl. 50.000hs L70/B10 III MacAdam 3 24V 650°C



18°

| Family                                   | Color T°                              | Beam Angle                  | Finish                         | Control System                                                                                                                                                              |
|------------------------------------------|---------------------------------------|-----------------------------|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>60111</div> <div>Nina slim 4W</div> | <div>927</div> <div>2700K CRI90</div> | <div>1</div> <div>18°</div> | <div>02</div> <div>Black</div> | <div>W</div> <div>CASAMBI</div> <div>D</div> <div></div> <div></div> <div>ON/OFF</div> |



NESO POINT 3L

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 4W    | 217 / 221lm  | 12° / 34°  |
| 930    | 3000k    | 90  | 4W    | 292 / 298lm  | 12° / 34°  |

NESO POINT 6L

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 8W    | 480 / 487lm  | 12° / 34°  |
| 930    | 3000k    | 90  | 8W    | 506 / 512lm  | 12° / 34°  |

NESO POINT 12L

| Option | Color T° | CRI | Power | Lumen Output  | Beam Angle |
|--------|----------|-----|-------|---------------|------------|
| 927    | 2700k    | 90  | 8W    | 1102 / 1109lm | 12° / 34°  |
| 930    | 3000k    | 90  | 8W    | 1107 / 1112lm | 12° / 34°  |

NESO LINE 32cm

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 6W    | 892lm        | 100°       |
| 930    | 3000k    | 90  | 6W    | 920lm        | 100°       |

NESO LINE 64cm

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 18W   | 1399lm       | 100°       |
| 930    | 3000k    | 90  | 18W   | 1442lm       | 100°       |

NESO HOLE ø3.5cm

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 5W    | 360 / 372lm  | 20° / 40°  |
| 930    | 3000k    | 90  | 5W    | 592 / 602lm  | 20° / 40°  |

NESO HOLE ø5cm

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 10W   | 825 / 932lm  | 18° / 36°  |
| 930    | 3000k    | 90  | 10W   | 954 / 961lm  | 18° / 36°  |

NESO HOLE ø7cm

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 20W   | 925 / 931lm  | 18° / 36°  |
| 930    | 3000k    | 90  | 20W   | 954 / 961lm  | 18° / 36°  |

NESO UNIK

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 5W    | 256lm        | 325°       |
| 930    | 3000k    | 90  | 5W    | 264lm        | 325°       |

NESO TOP

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 5W    | 360 / 371lm  | 20° / 40°  |
| 930    | 3000k    | 90  | 5W    | 444 / 452lm  | 20° / 40°  |

NESO SLIM POINT 12L

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 12W   | 816lm        | 25°        |
| 930    | 3000k    | 90  | 12W   | 841lm        | 25°        |

NESO SLIM POINT 24L

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 24W   | 1674lm       | 25°        |
| 930    | 3000k    | 90  | 24W   | 1726lm       | 25°        |

NESO SLIM LINE 30cm

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 6W    | 322lm        | 100°       |
| 930    | 3000k    | 90  | 6W    | 332lm        | 100°       |

NESO SLIM LINE 70cm

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 18W   | 875lm        | 100°       |
| 930    | 3000k    | 90  | 18W   | 902lm        | 100°       |

NESO SLIM HOLE ø3.5cm

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 5W    | 334 / 334lm  | 20° / 40°  |
| 930    | 3000k    | 90  | 5W    | 347 / 344lm  | 20° / 40°  |

NESO SLIM HOLE ø5cm

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 10W   | 545 / 572lm  | 18° / 36°  |
| 930    | 3000k    | 90  | 10W   | 562 / 590lm  | 18° / 36°  |

NESO SLIM UNIK

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 5W    | 230lm        | 325°       |
| 930    | 3000k    | 90  | 5W    | 237lm        | 325°       |

NESO SLIM TOP

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 5W    | 308 / 310lm  | 20° / 40°  |
| 930    | 3000k    | 90  | 5W    | 318 / 320lm  | 20° / 40°  |

NESO SLIM ANNA

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 6W    | 203lm        | 15°        |

NESO SLIM DIANA

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 6W    | 317lm        | 18°        |

NESO SLIM NINA

| Option | Color T° | CRI | Power | Lumen Output | Beam Angle |
|--------|----------|-----|-------|--------------|------------|
| 927    | 2700k    | 90  | 4W    | 108lm        | 18°        |