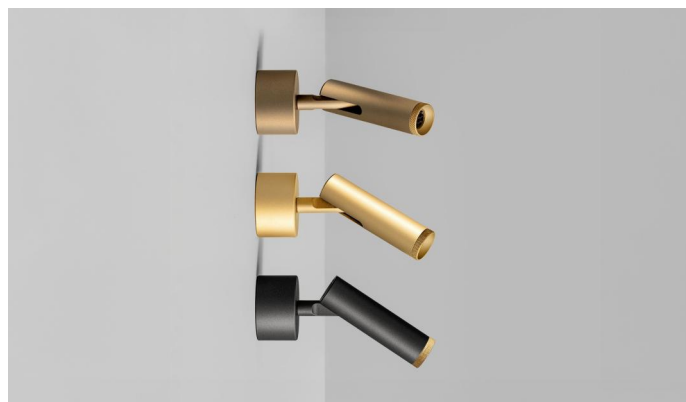



INDOOR


PARETE / WALL

BEAM MASTER Ø25

- alluminio

- aluminum



4360	M 2700K	W 3000K	N 4000K		
Potenza/ Power	1x4.2W	1x4.2W	1x4.2W		
Nominal lumen	1x490lm	1x513lm	1x550lm		
CRI	>90	>90	>90		
Alimentazione/ Supply	24Vdc	24Vdc	24Vdc		
	Articolo Item	Temperatura Temperature	°Ottica °Optic	Ghiera Ring	Corpo Body
	4360	M	06	-BO	-BO
		W	35	-NO	-NO
		N		-BV	-BV
				-OR	-OR
				-RR	-RR
				-TI	-TI

Driver 24Vdc in tensione in remoto / Remote constant voltage drivers 24Vdc

Articolo Item	art. alimentabili items powerable	Potenza Power	IP	Dimensioni Dimensions	Dimmerazione Dimming
1A0530	1	8W	IP20	42x40x22	ON-OFF
1A0150	1-2	30W	IP20	154x50x14	ON-OFF
1A1910	1-4	60W	IP20	185x63,5x22	ON-OFF
1A1476	1-7	100W	IP20	177x56,4x17,2	ON-OFF
1A2168	1-7	100W	IP20	190x65x22	PUSH DALI
1A1999	1-7	100W	IP20	201x63x30	L-C

Centraline dimmerabili in remoto / Remote dimmable controllers

Articolo Item	Potenza Power	IP	Dimensioni Dimensions	Dimmerazione Dimming	
1A0837/24	144W	IP20	132x22x20	PUSH DALI 1-10V	
1A0838/24	288W	IP20	164x38x25	PUSH DALI 0-10V 1-10V	
Controller 1 canale - DC 1-channel controller - DC	1A0172/24	288W	IP20	57x44x25	PUSH CASAMBI