
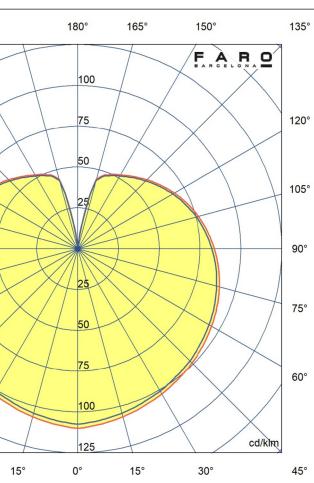


IK06 IP65

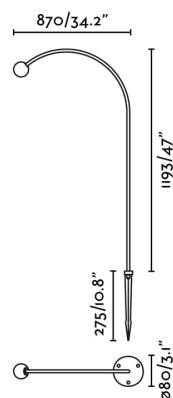

Mounting	Floor
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	65
IK	06
Power (W)	3
Energy class light source	G
Light source	COB LED
Light source included	Yes
Power factor	0.7
Luminous Flux (lm)	154
Color temperature (K)	2700K
Dimmable luminaire (W)	No
CRI	>90
Suitable for seaside areas	No
Driver included	Yes
Cable length	500 mm
Structure material	Stainless Steel
Diffuser material	Glass
Structure finish	Black
Diffuser finish	Opal
Other functionalities	Includes IP68 connector

Installation instructions

Energy label

Photometric





