
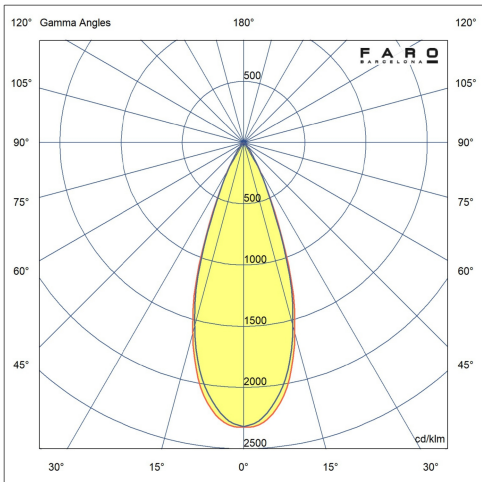





Mounting	Wall, Ceiling
Voltage (V)	24VDC
Hertz	50/60Hz
Class	I
IP	65
Power (W)	6
Energy class light source	F
Light source	COB LED
Light source included	Yes
Luminous Flux (lm)	524
Color temperature (K)	3000K
Dimmable luminaire (W)	No
Opening angle degrees	38
Rotation angles 1	360
Rotation angles 2	360
CRI	>80
Suitable for seaside areas	No
Driver included	Yes
Structure material	Aluminium
Shade material	Aluminium
Structure finish	Black
Shade finish	White & Black

Installation instructions

Energy label

Photometric

Related accessories



Clap Visor Accessory	
Reference	75714-2
Structure material	PC



