


Mounting	Floor
Voltage (V)	24VDC
Class	III
IP	65
Power (W)	2X6
Energy class light source	F
Light source	COB LED
Light source included	Yes
Luminous Flux (lm)	2x524
Color temperature (K)	3000K
Dimmable luminaire (W)	Yes
Opening angle degrees	38
Rotation angles 1	360
Rotation angles 2	360
CRI	>80
Suitable for seaside areas	No
Driver included	No
Recommended driver On/Off	98324026
Luminaires per On/Off driver	De 1 a 2
Cable length	2000 mm
Structure material	Aluminium + Stainless Steel
Shade material	Aluminium
Structure finish	Black
Shade finish	White & Black

Installation instructions

Energy label

Photometric

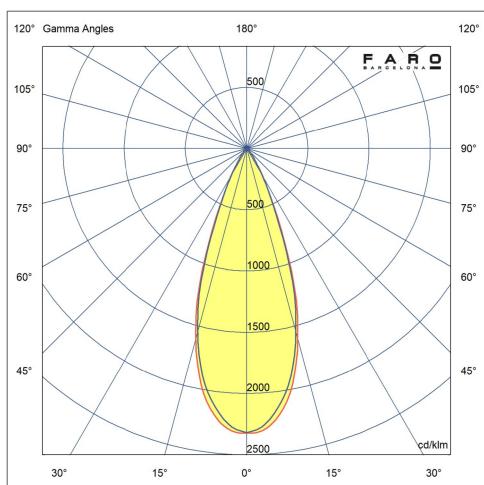

Recommended Drivers

Power Supply 24W 24vdc 220-240V Lineal IP67

Reference	98324026
IP	67
Control System	on/off



Related accessories



Clap Visor Accessory

Reference	75714-2
Structure material	PC





