



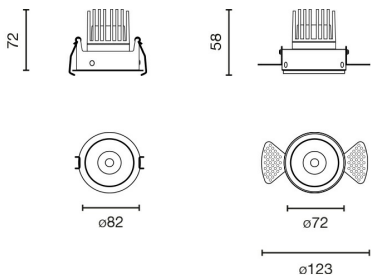

CASAMBI



Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	6,4
Energy class light source	G
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Luminous Flux (lm)	611
Color temperature (K)	2400-6500K
Dimmable luminaire (W)	Yes
Opening angle degrees	15
Photobiological risk	1
CRI	90
Control System	CASAMBI
Driver included	Yes
Supply current	200 mA
Structure material	Aluminium + Aluminium
Structure finish	Black+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

 Installation instructions

 Energy label

 Photometric

Related accessories



Elios Frame	
Reference	0700PP0303
Structure material	Aluminium



Elios Frame	
Reference	0700PP0304



Elios Trimless Frame	
Reference	0700PP0301



Elios Double Frame	
Reference	0700PP0305



Elios Double Frame

Reference	0700PP0306
-----------	------------



Elios Trimless Double Frame

Reference	0700PP0307
-----------	------------