



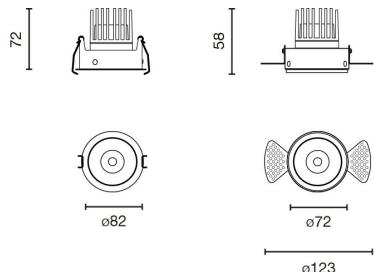

**CASAMBI**



Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	6.4
Energy class light source	G
Light source	COB LED
Light source included	Yes
Incandescent wire	650
Lifespan	50.000h L70 B10
Power factor	0.8
Luminous Flux (lm)	679
Color temperature (K)	2400-6500K
Dimmable luminaire (W)	Yes
Opening angle degrees	36
Photobiological risk	1
CRI	90
Control System	CASAMBI
Driver included	Yes
Supply current	200 mA
Structure material	Aluminium + Aluminium
Structure finish	Black+Black
Cut-out Size for Recessed Mount	75
Minimum Recessed Height (mm)	92
Maximum Ceiling Thickness (mm)	25

[Installation instructions](#)

[Energy label](#)

[Photometric](#)



**Related accessories**

Elios Frame

---

Reference	0700PP0303
Structure material	Aluminium

---



Elios Frame

---

Reference	0700PP0304
-----------	------------

---



Elios Trimless Frame

---

Reference	0700PP0301
-----------	------------

---



Elios Double Frame

---

Reference	0700PP0305
-----------	------------

---





Elios Double Frame

Reference

0700PP0306



Elios Trimless Double Frame

Reference

0700PP0307

