

NEBO LED 1-R PLASTER IN ADJUSTABLE DOWNLIGHT

TRUE COLOUR CRI 98 | IP65

DLD/NEBO-A

DLD
ARCHITECTURAL




DETAILS

Type	Adjustable 25°
IP Rating	IP65
IP Zone	Zone 1
Class	I
Standards	CE
Fire Rated	With accessory
Material	Aluminium
Cable	2 Core 0.5mm ²
Cable Length	400mm
Warranty	5 Years


KEY POINTS

- True Colour CRI 98, amazingly high level of colour rendering
- R9 95, reds are redder than ever
- Simple access to the light engine for easy maintenance
- Dim to dark with our range of fully tested drivers

DIMENSIONS

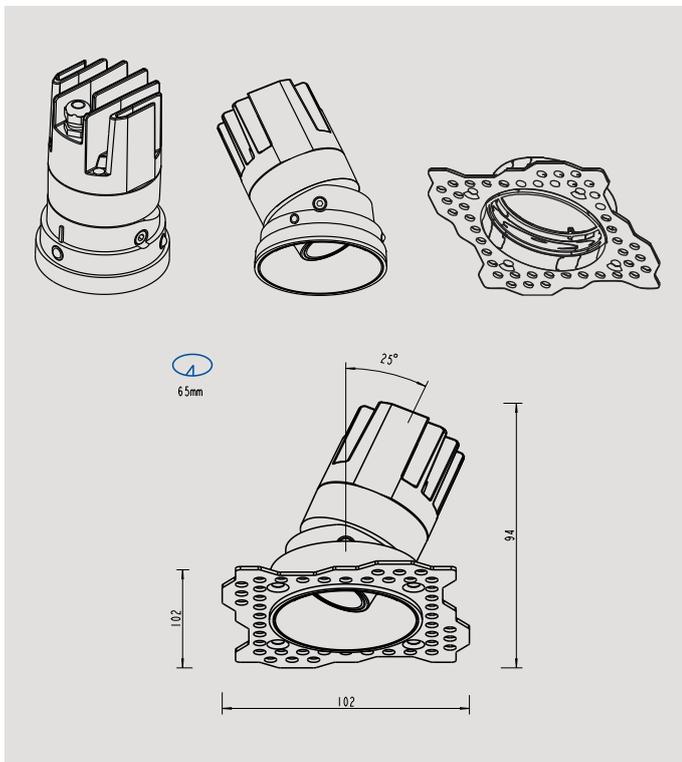

Fitted Dims:	Ø60mm
Light Engine:	Ø59.4mm, H.94mm
Plaster Kit:	102 x 103mm H.30mm
Cutout:	Ø65mm
Fire Ring Cutout:	Ø71mm

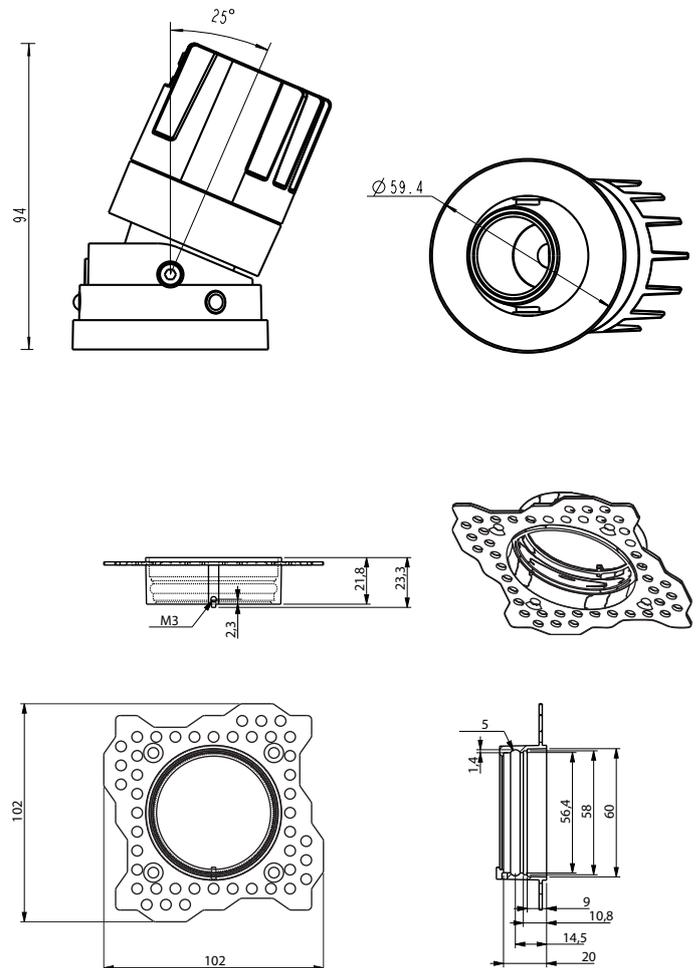

TRUE COLOUR 98 CRI

NEBO LED 1-R PLASTER IN ADJUSTABLE DOWNLIGHT

TRUE COLOUR CRI 98 | IP65

DLD/NEBO-A

DLD
ARCHITECTURAL

PRODUCT CODE CONSTRUCTION

MODEL	VERSION	FINISH	BAFFLE	BEAM ANGLE	LIGHT TEMP. CCT	DRIVER
DLD/NEBO	A	W	B	36D	27K	MD
	A Adjustable Plaster-In	W White B Black	W White B Black	36D 36°	27K 2700K 30K 3000K 4000K on request	No driver TRIAC dim. 0-10V dim. DALI dim.

SPECIFICATION

BEAM ANGLE

Delivered lumens*
*(Tc 85°C, +/-7%)
Efficacy Lm/W

36°

710 lm

55 lm/W

CCT

2700K

3000K

Binning SDCM (Hot)
CRI
R9
TM30 Rf Rg

2
98
95
Rf 95 Rg 95

LED Type
LED Lifetime (Ave.)

Luminus Gen. 6 CXM-6 COB LED
50,000 hrs

POWER

Wattage
Voltage
Voltage Output
Current

13W
220-240 V
43.33V
300mA

DRIVER

Supported Protocols
Dim to Dark
Distance from Luminaire
Wiring
Emergency

Mains Dim / TRIAC / 0-10V / DALI / Bluetooth
0.1% Lux
20m maximum
Series
Emergency packs available

 **01189 889414**

 **sales@darklightdesign.com**

 **darklightdesign.com**

Darklight Design
Unit 10 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH