Circ
wall light

Table of contents

Versions:

CIR_3720 (Indoor version)
Page 4

CIR_3720B (Bathroom version)
Page 5

CIR_3720X (Outdoor version)
Page 6

Circ
wall light

1. Product overview

Metallic wall light providing soft, diffused illumination through a satin-finished opal glass or polyethilene shade. The shade emits a gentle glow that offers general ambient lighting. Suitable for indoor locations (glass shade). Suitable for outdoor locations (polyethylene shade).

2. Finishes and Materials

Shade:
Glass (Indoor)
Polyethylene (Outdoor)

Body:
61 Satin gold (Indoor Only)
26 Black

Optional laser -cut signage:
Indoor and Outdoor
Minimum order 10 units

Laser-cut numbered metal plate finish:
94 Champagne (Indoor Only)
55 Beige(Outdoor)

3. Light Source & Dimming

Lamping (Indoor and bathroom, version with glass shade):
LED 10W (2700K / Ang. 120° / >90 CRI) 230V / Typ* 870 lumens
*Integrated LED module (included).

Lamping (Outdoor, version with polyethylene shade):
LED 8W (2700K / Ang. 120° / >90 CRI) 230V / Typ* 665 lumens
*Integrated LED module (included).

Dimming options:
Standard: TRIAC
Optional: DALI

4. Functionality & Accessories

Versions and sizes available for projects. Consult our offices.

Optional laser-cut signage
Indoor and Outdoor
Minimum order 10 units

Version with an adjustable reading light and a dual switch, offering independent control for each light source.
Available for projects.

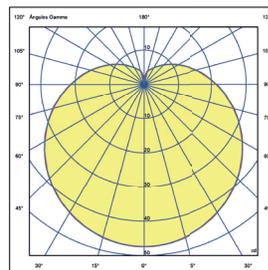## 5. Photometric Data and Technical Information

Photometric data corresponds to the output of each individual lamp.
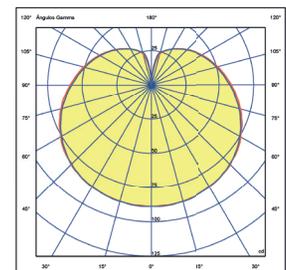Access to photometric files in download area.

2D / 3D / BIM Files available.
Access to files in download area here

8W (Polyethylene Shade)   10W (Glass Shade)

ESTILUZ, S.A.
Carretera d'Ogassa, s/n
17860 Sant Joan de les Abadesses
T +34 972 720 125

estiluz@estiluz.com
www.estiluz.com

3

Circ
wall light

6. Ordering Codes

Lamping 3720
LED 10W (2700K / Ang 120° / >90 CRI)
230V / Typ* 870 lumens
DIM: TRIAC (Optional DALI)

Finishes:
Shade:
Glass

Body:
61 Satin gold
26 Black

Optional laser-cut signage:
94 Champagne
55 Beige

Drawing		Mounting	Setting	Finish Body	Ordering Code
CIR_3720 IP20	Ø 160 mm Ø 6.1/4" 139 mm 5.1/2" 300 mm 11.3/4" 40 mm 1.5/8"	Wall lamp. Surface mounted.	Indoor	Satin Gold	CIR_3720_61W
			Indoor	Black	CIR_3720_26W

Circ
wall light

6. Ordering Codes

Lamping 3720B
LED 10W (2700K / Ang 120° / >90 CRI)
230V / Typ* 870 lumens
DIM: TRIAC (Optional DALI)
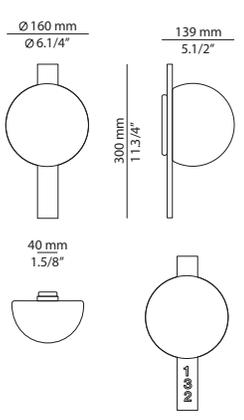
Finishes:
Shade:
Glass

Body:
61 Satin gold
26 Black

Drawing	Mounting	Setting	Finish Body	Ordering Code
CIR_3720B IP44 Ø 160 mm / Ø 6.1/4" 139 mm / 5.1/2" 300 mm / 11.3/4" 40 mm / 1.5/8"	Wall lamp. Surface mounted.	Bathroom	Satin Gold	CIR_3720B_61W
		Bathroom	Black	CIR_3720B_26W

Circ
wall light

6. Ordering Codes

Lamping 3720X
LED 8W (2700K / Ang 120° / >90 CRI)
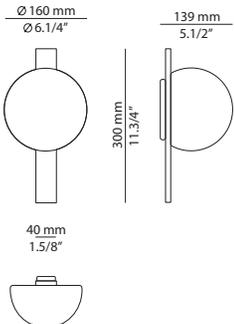230V / Typ* 665 lumens
DIM: TRIAC (Optional DALI)

Finishes:
Shade:
Polyethylene

Body:
26 Black

Optional laser-cut signage:
55 Beige

Drawing	Mounting	Setting	Finish Body	Ordering Code
CIR_3720X IP 55 Ø160 mm / Ø6.1/4" 139 mm / 5.1/2" 300 mm / 11.3/4" 40 mm / 1.5/8"	Wall lamp. Surface mounted.	Outdoor	Black	CIR_3720X_26W

Circ
wall light

7. Certifications & Standards

CIR_3720	CE	⊕	$\frac{IP}{20}$	960°	**F** ▶
CIR_3720B	CE	⊕	$\frac{IP}{44}$	960°	**F** ▶
CIR_3720X	CE	⊕	$\frac{IP}{55}$	850°	**F** ▶

Warranty: 2 years
100% made in Spain

8. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1.   Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2.   For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3.   Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.