Belt
suspension lamp

Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

Table of contents

1. Product overview — Page 2
2. Finishes and materials — Page 2
3. Light Source & dimming — Page 2
4. Functionality & accessories — Page 3
5. Recommended use & installation height — Page 3
6. Installation — Page 4
7. Photometric data and technical information — Page 4
8. Ordering codes — Page 5
9. Certifications & standards — Page 20
10. Maintenance & Cleaning — Page 20

Versions:

Individual
Page 5

Individual S-M-L
Page 7

Multiple linear
Page 13

Multiple round
Page 17

estiluz®
ESTILUZ, S.A.
Carretera d'Ogassa, s/n
17860 Sant Joan de les Abadesses
T +34 972 720 125
estiluz@estiluz.com
www.estiluz.com

Belt
suspension lamp

1. Product overview

Suspension lamp featuring a metal body, textile cable, optional metal and glass shades. Acrylic (PMMA) lens diffuser, and integrated LED. The metal and glass shades can be arranged in multiple positions and combinations, allowing for customizable designs and light effects. The metal shade comes in three sizes and can be mounted facing up or down during installation. Adjustable height. Individual or multiple canopy, suitable for creating various compositions.

2. Finishes and Materials

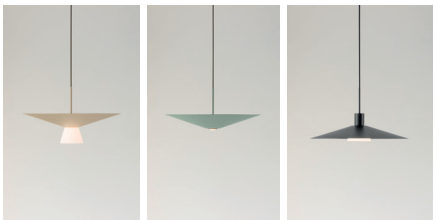

We offer custom plated or RAL finishes and shades.

Glass Shade: White Opal

Body/Metal Shade: 89 Pale Green
94 Champagne
96 Anthracite

Recessed Canopy: 74 White

Surface Canopy: 89 Pale Green
94 Champagne
96 Anthracite

Textile Cable: Grey (Green & Champagne finishes)
Black (Anthracite finish)

3. Light Source & Dimming

Lamping per head (with glass shade)
LED 6,2W (Ang. 70º / >90 CRI / 350mA) 230V
2700K / Typ* 725 lumens
3000K / Typ* 763 lumens
*Integrated LED module (included).

Lamping per head (without glass shade)
LED 6,2W (Ang. 60º / >90 CRI / 350mA) 230V
2700K / Typ* 725 lumens
3000K / Typ* 763 lumens
*Integrated LED module (included).

Dimming options:
Standard: TRIAC
Optional: DALI, CASAMBI

Belt
suspension lamp

4. Functionality & Accessories

Possibility to create different compositions. Versions and sizes available for projects. Consult our offices.

Flexibility / Possible Shapes:

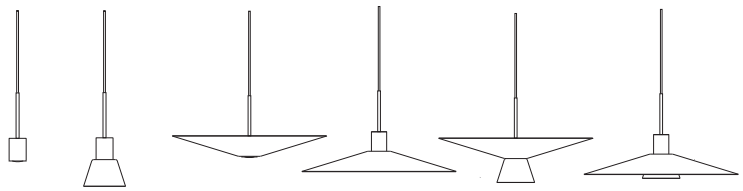

Vegetation kit with artificial greenery. Not waterproof. Suitable for pendant with large metal shade (450 mm) .

5. Recommended use & Installation height

Suitable for general lighting, as well as for direct illumination above dining tables, countertops, bars, or desks.
We **recommend positioning** the light source approximately **85 cm above the surface**. For more accurate information, reffer to the photometric report.

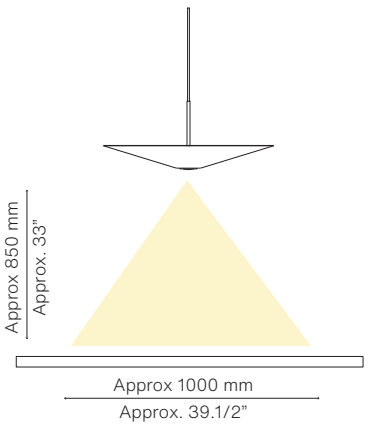

estiluz®
ESTILUZ, S.A.
Carretera d'Ogassa, s/n
17860 Sant Joan de les Abadesses
T +34 972 720 125
estiluz@estiluz.com
www.estiluz.com

Belt
suspension lamp

6. Installation

Single canopy

Surface

Recessed with remote driver

Ø 45 mm drill in dropped ceiling

Clusters

Linear

Round

7. Photometric Data and Technical Information

Photometric data corresponds to the output of each individual lamp.
Access to photometric files in download area.

2D / 3D / BIM Files available. Access to files in download area here.

Acrylic lens, metal shade up



Acrylic lens, metal shade down





Acrylic lens, metal shade up, with glass





Belt
suspension lamp

Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping 4145SLG / 4145RLG
LED 6,2W (Ang. 70º / >90 CRI / 350mA) 230V
2700K / Typ* 725 lumens
3000K / Typ* 763 lumens

Canopy: Single

DIM: TRIAC (Optional DALI, CASAMBI)

Accessory available: Vegetation KIT

Finishes

Surface Canopy:
89 Pale Green
94 Champagne
96 Anthracite

Body:
89 Pale Green
94 Champagne
96 Anthracite

Recessed Canopy:
74 White

Drawing	Mounting	Finish Canopy	Finish Body	Ordering Code 2700K	Ordering Code 3000K
BEL_4145SLG 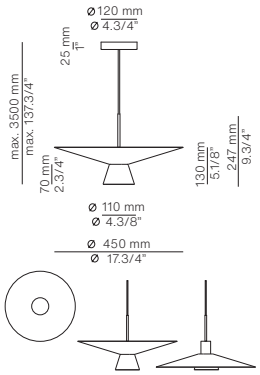	Surface mounted. Driver in the canopy.	Pale Green	Pale Green	BEL_4145SLG_8989W	BEL_4145SLG_8989M
		Champagne	Champagne	BEL_4145SLG_9494W	BEL_4145SLG_9494M
		Anthracite	Anthracite	BEL_4145SLG_9696W	BEL_4145SLG_9696M
BEL_4145RLG 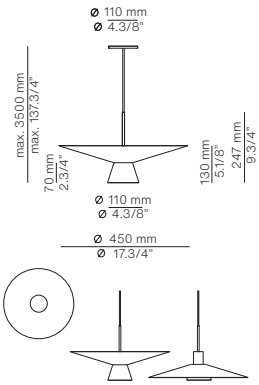	Recessed, Remote driver Ø 50 mm drill	White	Pale Green	BEL_4145RLG_7489W	BEL_4145RLG_7489M
		White	Champagne	BEL_4145RLG_7494W	BEL_4145RLG_7494M
		White	Anthracite	BEL_4145RLG_7496W	BEL_4145RLG_7496M

9. Certifications & Standards

IP 20 650°

Warranty: 2 years
100% made in Spain

10. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.