


Please read instructions before commencing installation and retain for future reference.

**⚠** Electrical products can cause death, injury, or property damage. Maintenance and installation should only be carried out by a professional electrician.

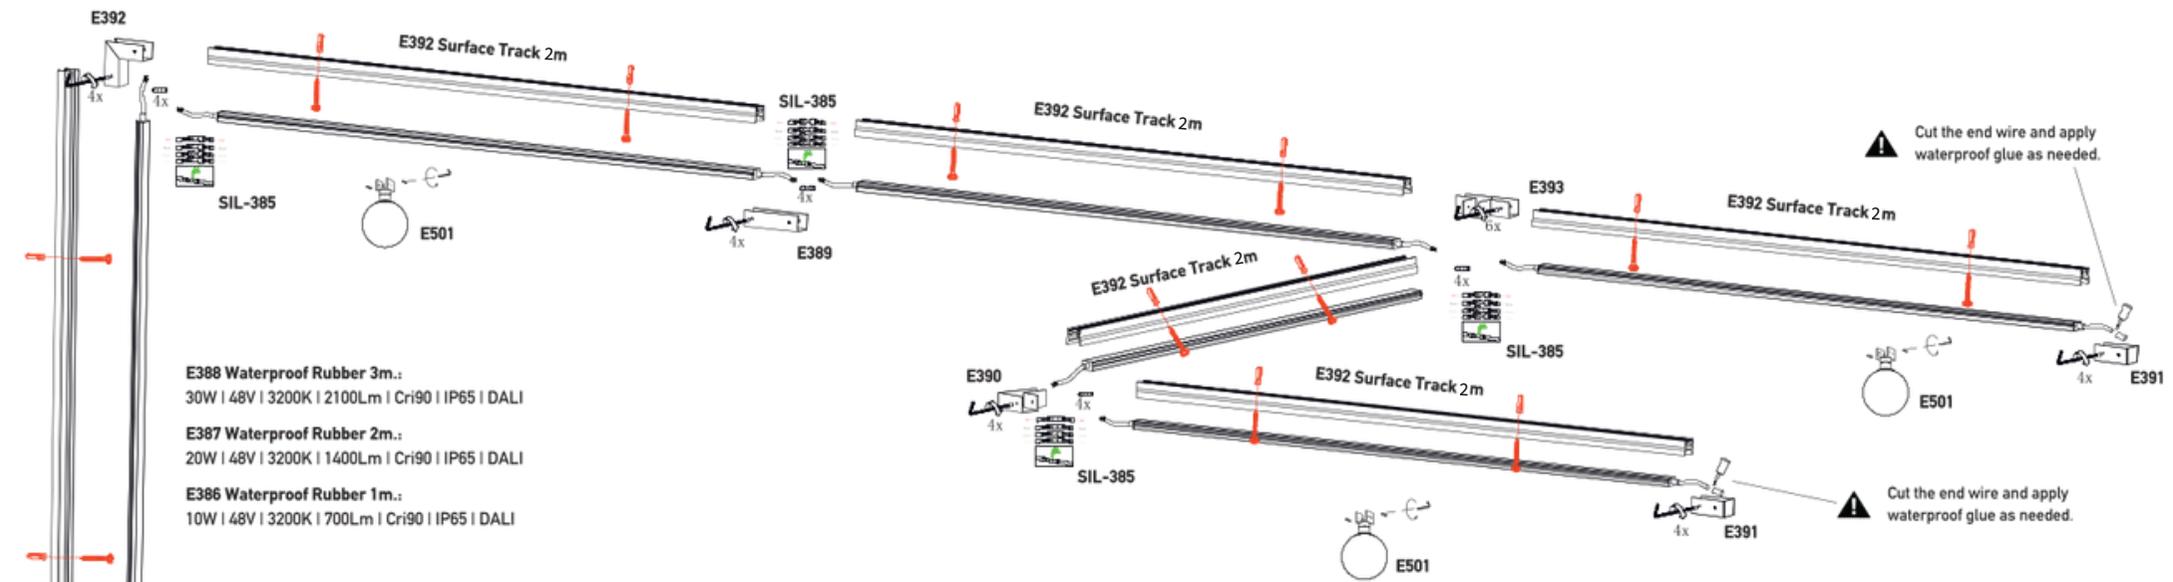

- E388 Waterproof Rubber 3m.:**  
30W | 48V | 3200K | 2100Lm | Cri90 | IP65 | DALI
- E387 Waterproof Rubber 2m.:**  
20W | 48V | 3200K | 1400Lm | Cri90 | IP65 | DALI
- E386 Waterproof Rubber 1m.:**  
10W | 48V | 3200K | 700Lm | Cri90 | IP65 | DALI


E392 Surface Track 2m



**DC 48V DALI Installation**

Red "+" and Black "-"  
Only power the waterproof rubber E386, E387, E388.

Green "+" and Grey "-"  
Only power E501.




**XSV160W48 Installation.:** 160W | 48V | IP67 | DALI

**⚠** Fits into surface mount box E397  
Remote installation

**XSV240W48 Installation.:** 240W | 48V | IP67 | DALI

**⚠** External application  
Remote installation


**SIL-385 Installation**



Fix them with hot air.

**E501 Installation.:** 9W | 48V | 3200K | 438Lm | Cri80 | IP65 | DALI

**⚠** Does not operate independently.  
Must be mounted on waterproof rubbers E386, E387, E388.

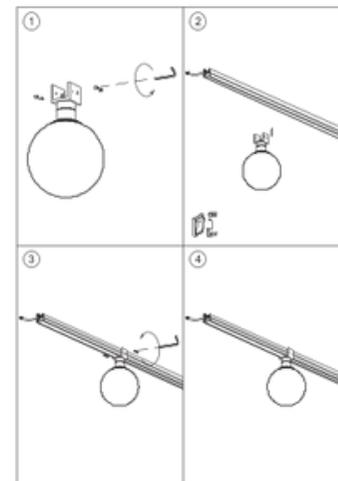

**WARNING**

- ⚠** Make sure that the products are installed properly before connecting to electricity. Do not cover the luminaire.
- Do not exceed the maximum wattage rating of the lamp.
- If the light source is contained in this luminaire (integrated LED), it shall only be replaced by the manufacturer, his service agent, or a similarly qualified person.