

NEBO LED 1-R PLASTER IN ADJUSTABLE DOWNLIGHT

TUNABLE WHITE 2200K-6500K | IP65

DLD/NEBO-A

DLD
ARCHITECTURAL




DETAILS

Type	Adjustable 25°
IP Rating	IP65
IP Zone	Zone 1
Class	I
Standards	CE
Fire Rated	With accessory
Material	Aluminium
Cable	4 Core
Cable Length	400mm
Warranty	5 Years


KEY POINTS

- Tunable white - switch from any light temperature between warm white 2200K to cool white 6500K
- True Colour CRI 98, amazingly high level of colour rendering
- R9 97, reds are redder than ever
- Full light engine access for maintenance

DIMENSIONS

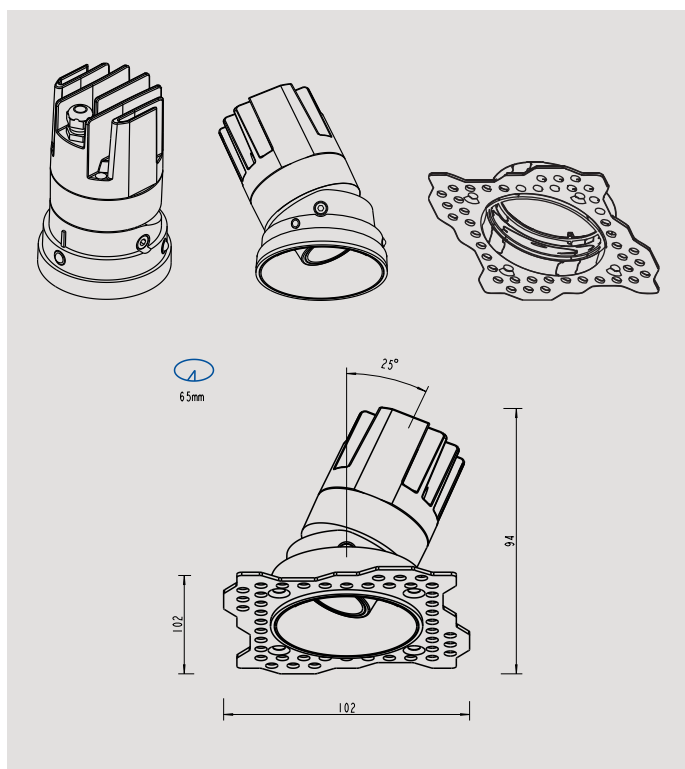

Fitted Dims:	Ø60mm
Light Engine:	Ø59.4mm, H.94mm
Plaster Kit:	102 x 102mm H.23.3mm
Cutout:	Ø65mm
Fire Ring Cutout:	Ø71mm

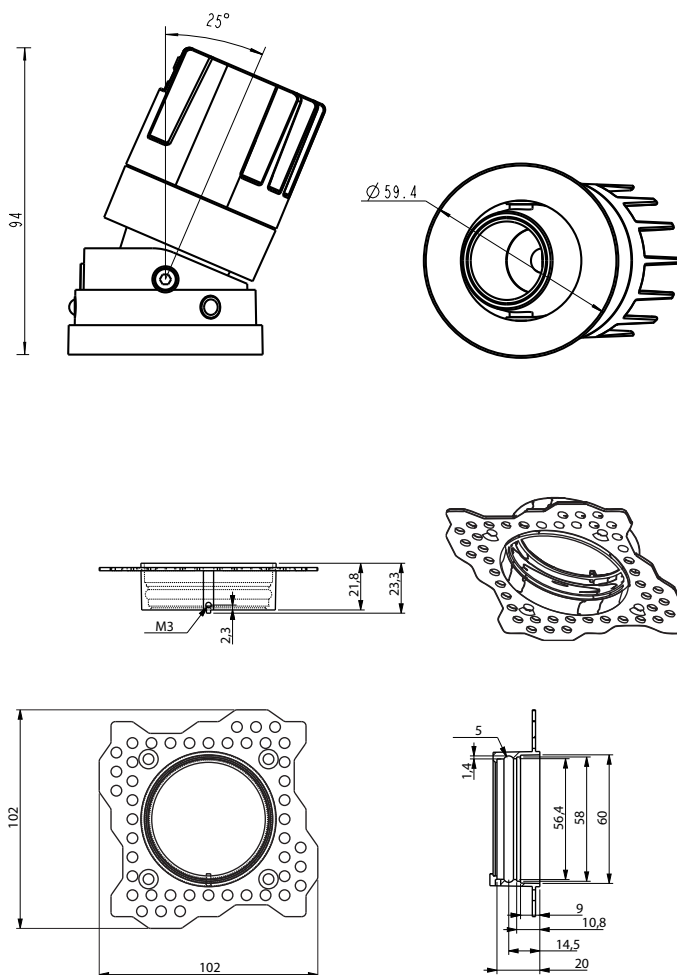

NEBO LED 1-R PLASTER IN ADJUSTABLE DOWNLIGHT

TUNABLE WHITE 2200K-6500K | IP65

DLD/NEBO-A

DLD
ARCHITECTURAL

PRODUCT CODE CONSTRUCTION

MODEL	VERSION	FINISH	BAFFLE	BEAM ANGLE	LIGHT TEMP. CCT	DRIVER
DLD/NEBO	A	W	B	36D	TW	D
	A Adjustable Plaster-In	W White B Black	W White B Black	36D 36°	TW Tunable white 2200K - 6500K	MD 010 D No driver TRIAC dim. 0-10V dim. DALI dim.

SPECIFICATION

	2200K			6500K			
BEAM ANGLE	15°	24°	36°	15°	24°	36°	
Delivered lumens (Tc 85°C, +/-7%)	*	*	750 lm	*	*	900 lm	* Available On Request
Efficacy Lm/W	*	*	*	*	*	*	* Available On Request
Binning SDCM (Hot)	2						
CRI	98						
R9	97						
TM30 Rf Rg	Rf 96 Rg 99						
LED Type	Luminus Gen. 6 CXM-6 COB LED						
LED Lifetime (Ave.)	50,000 hrs						
POWER							
Wattage	13W						
Voltage	220-240 V						
Voltage Output	43.33V						
Current	300mA						
DRIVER							
Supported Protocols	DALI / Casambi						
Dim to Dark	0.1% Lux						
Distance from Luminaire	20m maximum						
Wiring	Series						
Emergency	Emergency packs available						



01189 889414



sales@darklightdesign.com



darklightdesign.com

Darklight Design
Unit 10 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH