

HANGMAN - Floor

Rakumba

CODE - RP-E-2105


REVISION 23.10.23

REVISED BY: JC

- ① Hangman floor is packaged with the three legs separated for shipping.



- ② The 3 legs will be attached as pictured.

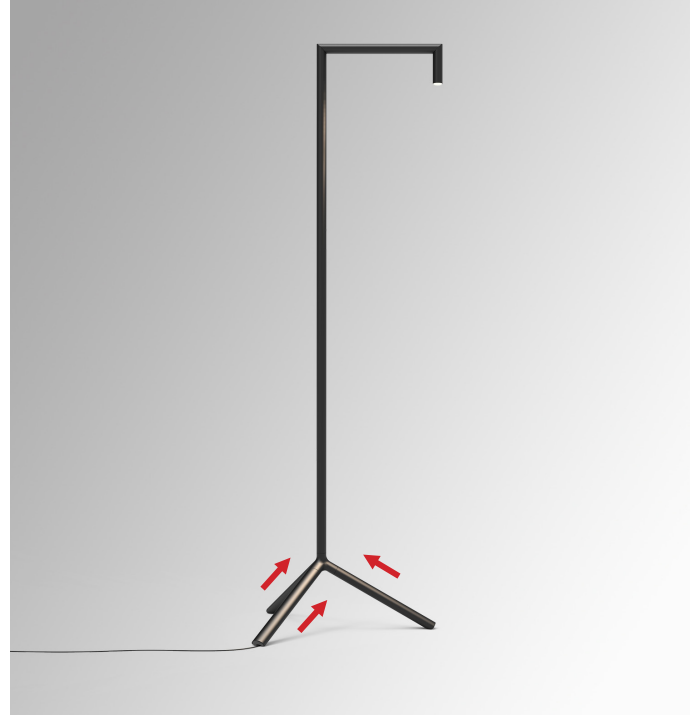

- ③ Each leg has a silver lock mechanism pre-installed as shown. A protruding grub screw retains the lock in place during shipping.



- ④ Align each leg with the corresponding tripod section. The tab on the tripod, and the lock on the leg should oppose each other. Push each leg fully over the tab.



HANGMAN - Floor

Rakumba

CODE - RP-E-2105

REVISION 23.10.23

REVISED BY: JC

- ⑤ Tighten the grub screw firmly with an M2 allen key (supplied)

- ⑥ Repeat for all three legs.



- ⑦ After assembly, use the supplied glove or a microfibre cloth to remove any fingerprints, marks or polishing residue.

NOTES

DIMMING (Foot Switch Controls)

Single brief press -> On/Off

Press and hold -> Dim Up/Down

Long press when off -> On at minimum output

SWIVEL

The mechanism is designed to rotate 270 degrees, not a full circle – there is a rotation limiting device to prevent internal cables being damaged. Never force the swivel to over-rotate past this point.

