

SURF 10 LED DOWNLIGHT




RECESSED | ADJUSTABLE
DLD/SURF10RA



SPECIFICATION

Power:	22W (2.2W x 10)
Current:	700mA
Lumens:	2000lm (200lm x 10)
Beam angle:	15° 30°
CCT:	2700K 3000K
CRI:	90+
Adjustable tilt:	0-25°

DIMENSIONS

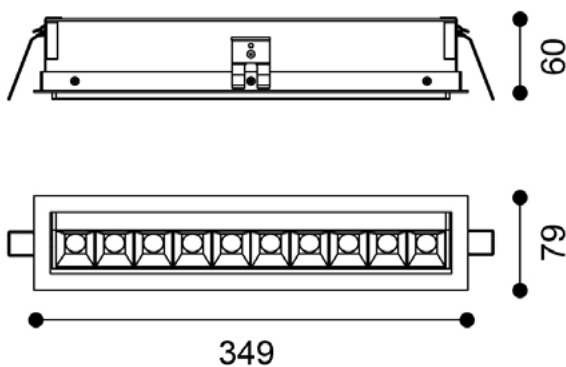

Length:	349mm
Width:	79mm
Depth:	60mm
Cutout:	293 x 70mm

TECHNICAL

Insulation:	Class I
Protection:	IP20
Operating temperature:	-20 ~ 40°C
Average failure temperature:	L70(6k) >3600 (h)

MATERIALS

Luminaire:	Steel
Reflector:	PC
Heat sink:	Extruded aluminium
Finish:	White
Baffle finish:	Black White




SURF 10 LED DOWNLIGHT


RECESSED | ADJUSTABLE
DLD/SURF10RA

DLD
ARCHITECTURAL

LIGHT DISTRIBUTION



h(m)	D(m)	E(lx)
15°		
1.0	0.26	13320
2.0	0.53	3330
3.0	0.80	1480
4.0	1.07	832
5.0	1.34	532

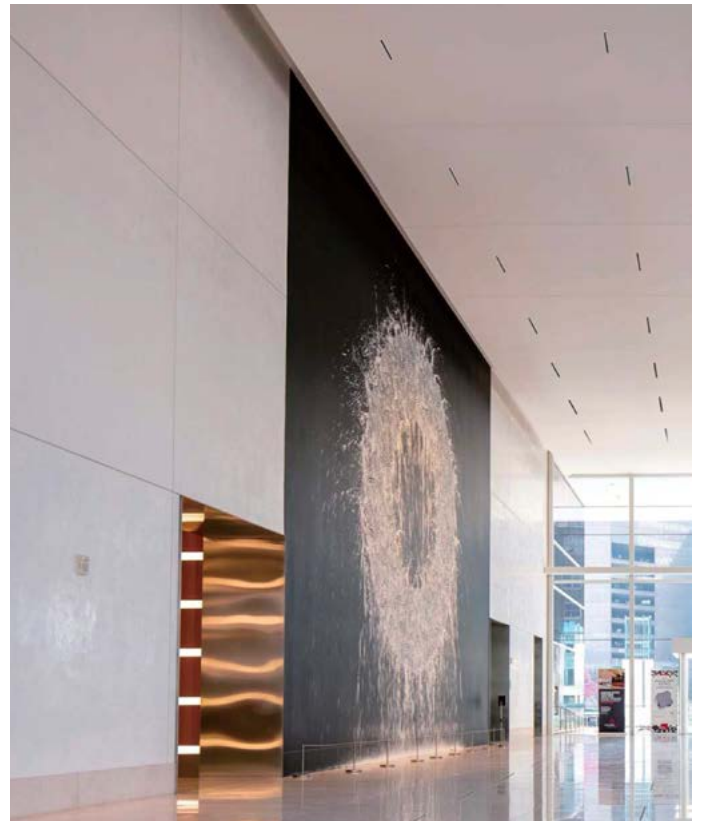

01189 889414



sales@darklightdesign.com



darklightdesign.com

Darklight Design
Unit 10 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH