


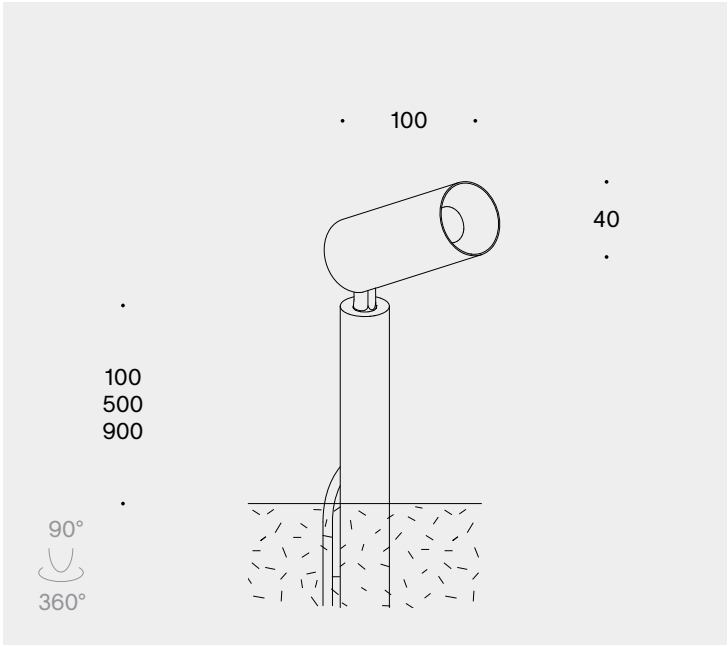

acrobat outdoor | pin up

installation

light specs

lamp	LED			
optic	glass lens			
driver	excluded			
IP	IP65			
CRI	90+			
SDCM	SDCM2			
class	class III			
height variations	0H	10H	50H	90H
pole / anchor pole	Ø26 mm		150 mm	
tilt	90°			
location	outdoor			
comes with	2m H07 cable			
marking	CE			

accessories

		drivers - cv
IP68 24V constant voltage dali pwm driver 60W		8000-0040
IP68 24V constant voltage dali pwm driver 120W		8000-0041
IP68 24V constant voltage dali pwm push driver 200W		8000-0042
		drivers - cc
IP68 non dimmable driver 42W constant current 500mA		8000-0038
IP68 dali dimmable driver 38W constant current 500mA		8000-0039
DALI dimmable driver 38W		8000-0021
0-10V dimmable driver 36W		8000-0022
non-dimmable driver 42W		8000-0023
DALI dimmable driver 60W		8000-0026

luminaire output

40°		
	2700K	3000K
350mA (5.7W)	525lm	550lm
500mA (8.5W)	710lm	750lm
700mA (12.8W)	950lm	1000lm