


acrobat outdoor | pin down

installation instruction

1

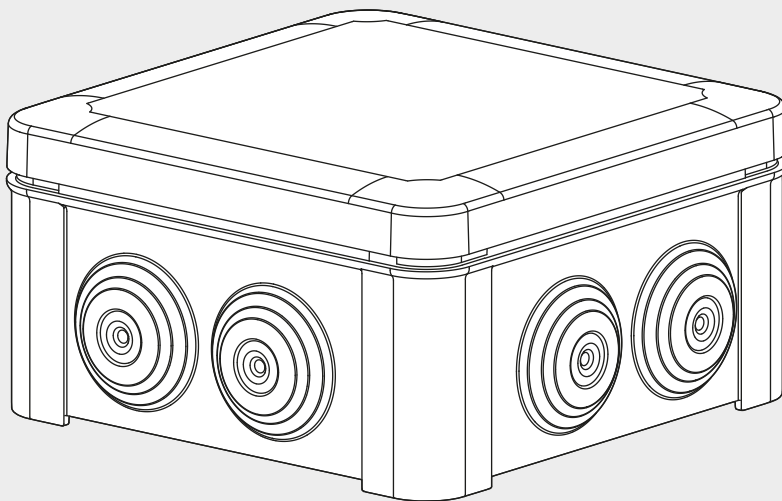


**POWER
OFF**






Use an outdoor connection box for the wire connections.
Make sure the power is turned off.

2

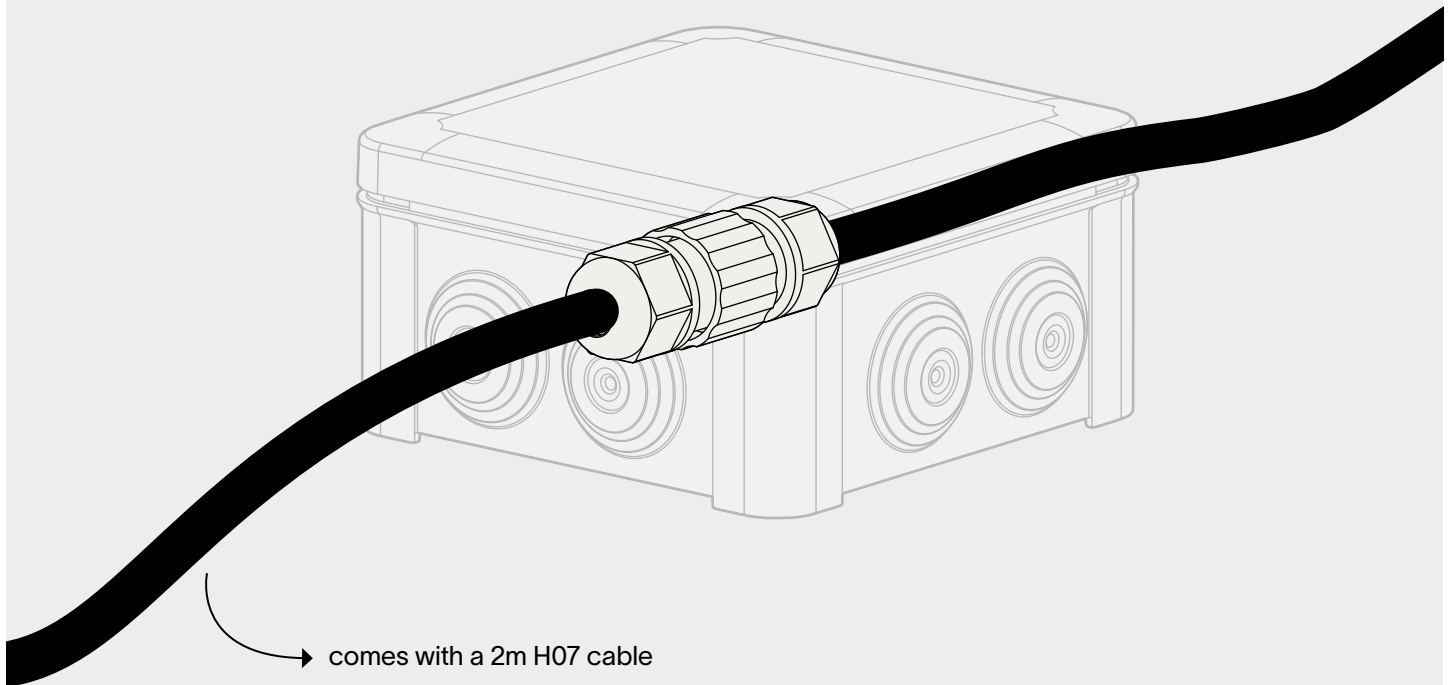

Make the connection inside the box using a waterproof connector (min. IP67).

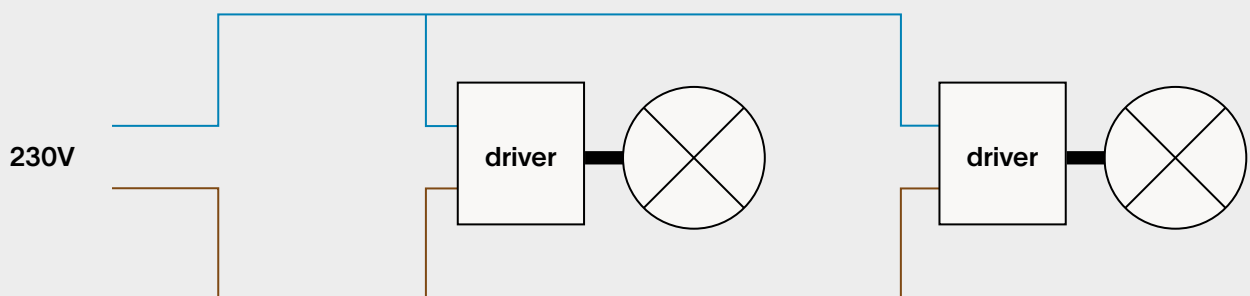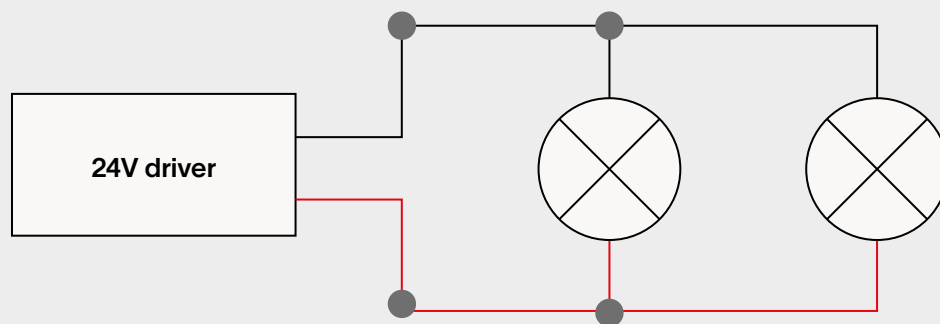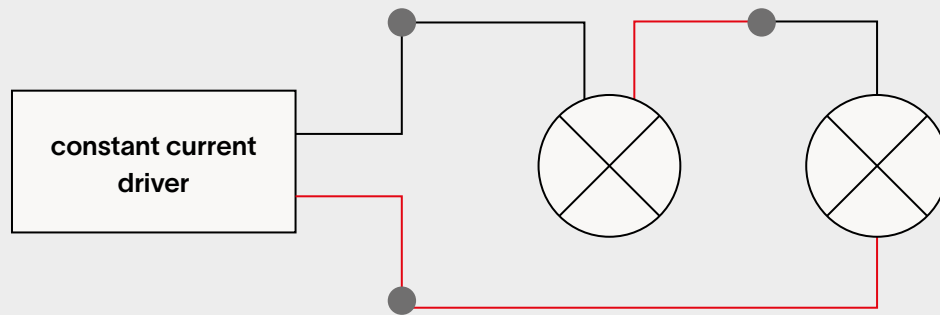

Combine with prado LED-driver, respect polarity:

- for constant current: serial connection
- for 24V driver: parallel connection
- for 230V: parallel connection


The installer is responsible for using the correct wire section and must consider the max. cable length to ensure safe and efficient system operation. Incorrect wire choice can lead to overheating, voltage drop, and equipment damage.

Important note for the installer

Ensure the external electrical connection for this fixture is waterproof. It is the installer's responsibility to use materials and techniques that meet IP standards and prevent water ingress. Failure to waterproof the connection may lead to fixture damage, electric shock, or short circuits.



Any risks or damages from improper waterproofing are the installer's responsibility. We strongly recommend using appropriate waterproofing materials for the installation environment.

3

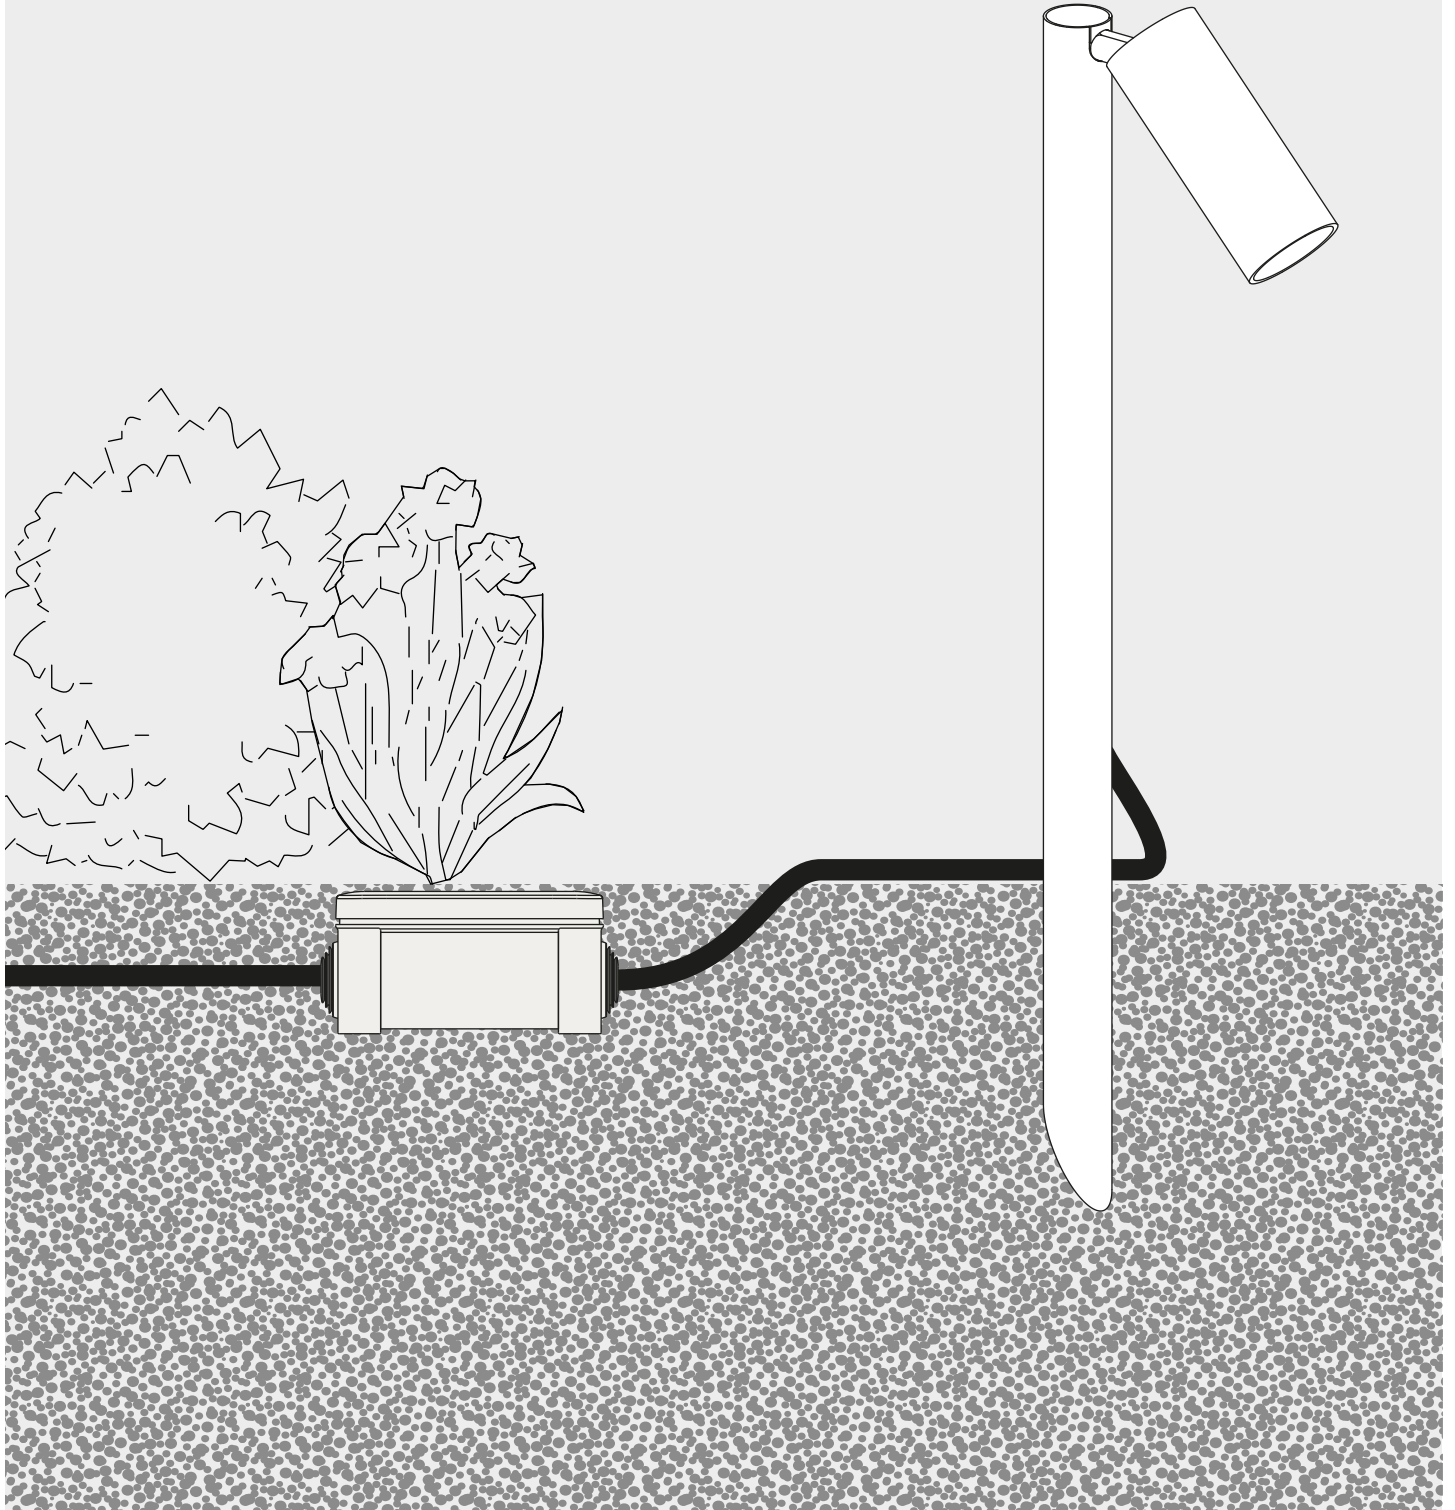




Install the fixture.

4

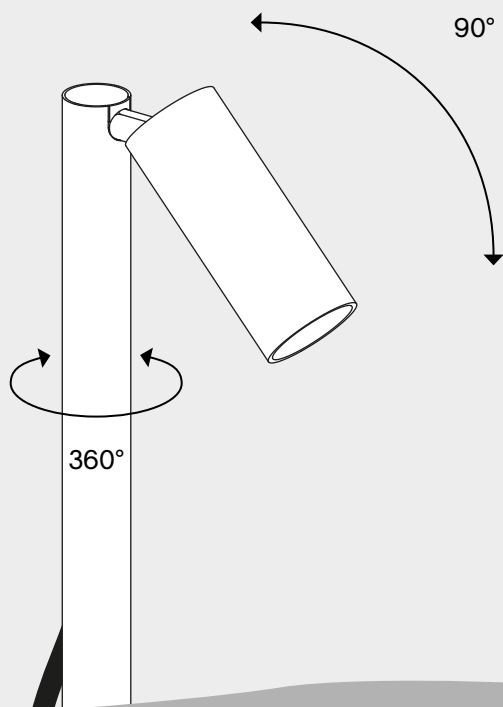**POWER
ON**

Twist the fixture as desired and turn the power back on.

5



To prevent overheating, do not light the fixture in the sunlight.

thank you for choosing prado



prado.com

Installation must be done by skilled professionals only and instructions must be followed at all times. Warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair a product.