


JENA 2

design: Roberto Mantovani



Supply current

Alimentazione
Courant d'alimentation
Stromversorgung
Corriente de alimentación

350-500 mA (V_f 2,9V)


Power

Potenza
Puissance
Bestuekung
Potencia


1-2 W

Series wiring

Cablaggio in serie
Câblage en série
Verkabelung in Serie
Cableado en serie



Photometric diagrams

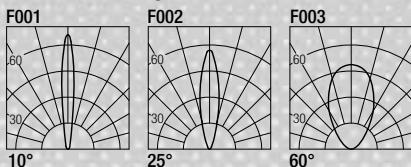

CCT/CRI/Flux

	350mA	500mA
2700K	89 lm	128 lm
3000K	93 lm	133 lm
4200K	103 lm	154 lm
6000K	114 lm	165 lm



Code Construction

Costruzione del codice - Construction du code produit
Bau der Produkt-Code - Construcción del código de producto

XJ11 X X X

Finishing

Finitura
Finitions
Oberflächenfinish
Acabados

G	N	K	Z
Grey Grigio Gris Grau	Black Nero Noir Schwarz Negro	COR-TEN	INOX AISI 316L Steel Acciaio Acier Stahl Acero

Color Temperature

Temperatura colore
Température couleur
Temperaturabhängige Farbe
Temperatura de color

0	1	2	3	6	7	8
2700K	3000K	4200K	6000K	Blue Blu Bleu Blau Azul	Green Verde Vert Grün	Red Rosso Rouge Rot Rojo

Beam angle

Apertura di fascio
Angle de faisceau
Strahlwinkel
Ángulo del haz

0	1	2
10°	25°	60°


Optionals

Accessori - Accessoires
Zubehör - Accesorios

CSXJ01

Recessing box

Controcassa
Boîtier d'encastrement
Eingießgehäuse
Caja de empotrar



Drivers

Alimentatori - Alimentateurs
Netzteile - Alimentadores

on/off	dimmbale
350 mA	
AL1034 (1..11) 30mm IP20	AL4000 (1..12) 72mm IP20 PUSH 1..10V
AL1035 (1..11) 40mm IP20	AL4051 (1..12) 72mm IP20 DALI
AL1037 (1..16) 55mm IP20 S.P.	AL4053 (1..12) 60mm IP20 IGBT-TRIAC
AL9011 (1..12) 60mm IP67	

on/off	dimmbale
500 mA	
AL1074 (1..7) 30mm IP20	AL4010 (1..12) 72mm IP20 PUSH 1..10V
AL1077 (1..6) 40mm IP20	AL4151 (1..12) 72mm IP20 DALI
AL1084 (1..11) 55mm IP20 S.P.	AL4153 (1..12) 60mm IP20 IGBT-TRIAC
AL9051 (1..10) 60mm IP67	