

NEW

# GEA FRAME ADJ IP40 - XS C.C.

**IP40 IK06**

| | |
|---|---|
| **TIPOLOGIA** / *TYPOLOGY* | **Incasso** / *Recessed* |
| **POSIZIONE INSTALLATIVA** / *INSTALLATION POSITION* | **A soffitto** / *Ceiling mounting* |
| **AMBIENTE INSTALLATIVO** / *INSTALLATION LOCATION* | **Interno** / *Indoor* |

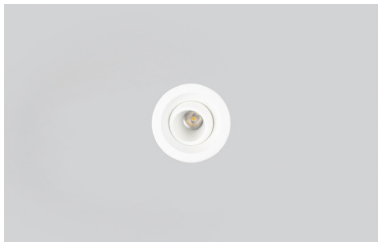

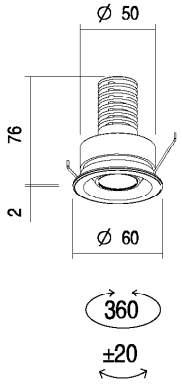


GEA **FRAME ADJ IP40 - XS C.C.**

**6W**

kg 0,217

52 mm

NEW

# GEA FRAME ADJ IP40 - XS C.C.

| **CARATTERISTICHE ELETTRICHE** \| *ELECTRICAL FEATURES* | |
|---|---|
| **POTENZA ASSORBITA** \| *POWER CONSUMPTION* | **6W** |
| **ALIMENTAZIONE** \| *POWER SUPPLY* | **C.C.** |
| **ALIMENTATORE** \| *POWER SUPPLY UNIT* | **6W - 500mA Non incluso** \| *Not included* |
| **COLLEGAMENTO** \| *CONNECTION* | **Serie** \| *Series* |

| **CARATTERISTICHE ILLUMINOTECNICHE** \| *LIGHTING FEATURES* | |
|---|---|
| **COLORE LED** \| *LED COLOUR* | **2700K, 3000K, 4000K** |
| **INDICE RESA CROMATICA CRI** \| *CRI* | **>90** (2700K, 3000K, 4000K) |
| **OTTICHE** \| *OPTICS* | **10°, 36°, 60°** |
| **UGR** | **<19** |
| **FLUSSO REALE EMESSO - 3000K**<br>*REAL OUTPUT FLUX* | **6W 408lm 36°** |
| **DURATA MEDIA LED** \| *AVERAGE LED LIFE* | **50.000h L80 B10** |

| **CARATTERISTICHE MECCANICHE \|** *MECHANICAL FEATURES* | |
|---|---|
| **PESO** \| *WEIGHT* | **Kg 0,217** |
| **FINITURE** \| *FINISHES* | **Bianco txt , Grigio txt, Nero txt**<br>txt White, txt Grey, txt Black |
| **INSTALLAZIONE** \| *INSTALLATION* | **A incasso su cartongesso o legno tramite molle (incluse), a incasso su muratura con cassaforma (non inclusa) e molle (incluse)**<br>*Recessed on plasterboard or wood with springs (included), on brickwork with housing box (not included) and springs (included)* |
| **MATERIALE** \| *MATERIAL* | **Corpo in alluminio verniciato con cornice, lente in PMMA**<br>*Varnished aluminium body with frame, PMMA lens* |


| **CARATTERISTICHE GENERALI \|** *GENERAL FEATURES* | |
|---|---|
| **TEMPERATURA DI ESERCIZIO**<br>*OPERATING TEMPERATURE* | **-10°C +45°C** |
| **GRADO DI PROTEZIONE** \| *INGRESS PROTECTION* | **IP40** |
| **GRADO DI RESISTENZA** \| *IMPACT RESISTANCE* | **IK06** |
| **GLOW WIRE TEST** \| *GLOW WIRE TEST* | **960°C** |
| **TEMPERATURA SCHERMO**<br>*SCREEN TEMPERATURE* | **40° @ Ta = 25°** |
| **CLASSE DI ISOLAMENTO** \| *APPLIANCE CLASS* | **III** |
| **CALPESTABILE** \| *WALKOVER* | **No** |
| **CARRABILE** \| *DRIVE OVER* | **No** |
| **SICUREZZA STANDARD** \| *STANDARD SAFETY* | **/** |
| **SICUREZZA FOTOBIOLOGICA**<br>*PHOTOBIOLOGICAL SAFETY* | **GR1** |

NEW

# GEA FRAME ADJ IP40 - XS C.C.

## ACCESSORI | *ACCESSORIES*

| | | |
|---|---|---|
| **CODICE** / *CODE* | **CMGI20** | |
| **TIPOLOGIA** / *TYPOLOGY* | **Cassaforma**<br>*Housing box* | kg 2,20 |
| **MATERIALE** I *MATERIAL* | **Acciaio inox e alluminio**<br>*Stainless steel and aluminium* | |




## FILTRI | *FILTER*

| | |
|---|---|
| **CODICE** / *CODE* | **HC** |
| **TIPOLOGIA** / *TYPOLOGY* | **Filtro Honeycomb**<br>*Honeycomb filter* |

