
NEW

# GEA FRAME ADJ IP40 - S C.C

**IP40 IK06**

| | |
|---|---|
| **TIPOLOGIA** / *TYPOLOGY* | **Incasso** / *Recessed* |
| **POSIZIONE INSTALLATIVA** / *INSTALLATION POSITION* | **A soffitto** / *Ceiling mounting* |
| **AMBIENTE INSTALLATIVO** / *INSTALLATION LOCATION* | **Interno** / *Indoor* |



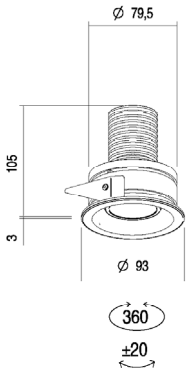


GEA **FRAME ADJ IP40 - S**

**12W**

kg 0,75

85 mm

LLD

NEW

# GEA FRAME ADJ IP40 - S C.C

## CARATTERISTICHE ELETTRICHE | *ELECTRICAL FEATURES*

| | |
|---|---|
| **POTENZA ASSORBITA** | *POWER CONSUMPTION* | **12W** |
| **ALIMENTAZIONE** | *POWER SUPPLY* | **C.C.** |
| **FREQUENZA** | *FREQUENCY* | **50/60 Hz** |
| **ALIMENTATORE** | *POWER SUPPLY UNIT* | **12W - 350mA Non incluso** | *Not included* |
| **COLLEGAMENTO** | *CONNECTION* | **Serie** | *Series* |

## CARATTERISTICHE ILLUMINOTECNICHE | *LIGHTING FEATURES*

| | |
|---|---|
| **COLORE LED** | *LED COLOUR* | **2700K, 3000K, 4000K** |
| **INDICE RESA CROMATICA CRI** | *CRI* | **>90** (2700K, 3000K, 4000K) |
| **BINNING** | **3 step MacAdam** | *3 MacAdam steps* |
| **OTTICHE** | *OPTICS* | **28°, 58°, Diffused** |
| **UGR** | **<19** |
| **FLUSSO REALE EMESSO - 3000K**<br>*REAL OUTPUT FLUX* | **12W 1041lm 28°** |
| **DURATA MEDIA LED** | *AVERAGE LED LIFE* | **50.000h L80 B10** |

## CARATTERISTICHE MECCANICHE | *MECHANICAL FEATURES*

| | |
|---|---|
| **PESO** | *WEIGHT* | **Kg 0,75** |
| **FINITURE** | *FINISHES* | **Bianco txt , Grigio txt, Nero txt**<br>txt White, txt Grey, txt Black |
| **INSTALLAZIONE** | *INSTALLATION* | **A incasso su cartongesso o legno tramite molle (incluse)**<br>**A incasso su muratura con cassaforma (non inclusa) e molle (incluse)**<br>*Recessed on plasterboard or wood with springs (included)*<br>*On brickwork with housing box (not included) and springs (included)* |
| **MATERIALE** | *MATERIAL* | **Corpo in alluminio verniciato con cornice, lente in PMMA**<br>*Varnished aluminium body with frame, PMMA lens* |

## CARATTERISTICHE GENERALI | *GENERAL FEATURES*


| | |
|---|---|
| **TEMPERATURA DI ESERCIZIO**<br>*OPERATING TEMPERATURE* | **-10°C +45°C** |
| **GRADO DI PROTEZIONE** | *INGRESS PROTECTION* | **IP40** |
| **GRADO DI RESISTENZA** | *IMPACT RESISTANCE* | **IK06** |
| **GLOW WIRE TEST** | *GLOW WIRE TEST* | **960°C** |
| **TEMPERATURA MASSIMA APPARECCHIO**<br>*MAX.TEMPERATURE OF FIXTURE* | **55° @ Ta = 25°** |
| **CLASSE DI ISOLAMENTO** | *APPLIANCE CLASS* | **III** |
| **CALPESTABILE** | *WALKOVER* | **No** |
| **CARRABILE** | *DRIVE OVER* | **No** |
| **SICUREZZA STANDARD** | *STANDARD SAFETY* | */* |
| **SICUREZZA FOTOBIOLOGICA**<br>*PHOTOBIOLOGICAL SAFETY* | **GR1** |

NEW

# GEA FRAME ADJ IP40 - S C.C

## ACCESSORI | *ACCESSORIES*

| | | |
|---|---|---|
| **CODICE** / *CODE* | **CMGI22** | |
| **TIPOLOGIA** / *TYPOLOGY* | **Cassaforma**<br>*Housing box* | kg 2,20 |
| **MATERIALE** I *MATERIAL* | **Acciaio inox e alluminio**<br>*Stainless steel and aluminium* | |




## FILTRI | *FILTER*

| | |
|---|---|
| **CODICE** / *CODE* | **HC** |
| **TIPOLOGIA** / *TYPOLOGY* | **Filtro Honeycomb**<br>*Honeycomb filter* |

