


Project: Type: USA/INT'L



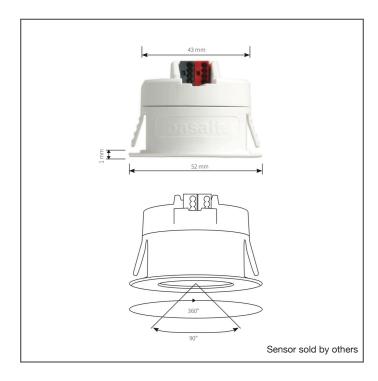

## VELO MOTUS Multi-Sensor

**Recessed Trimless Multi-Sensor** - Powered by Basalte's Auro, the Velo Motus allows you to intelligently monitor and manage your home, create a balance of form, efficiency, and safety, while continuing your design intent.

#### Construction

- Formed steel trim with powder coat paint finish combined with signature aluminum Apure© louver, available in various colors and combinations
- · Made in Germany, Design by Porsche Design Studio.
- · European torsion springs pull fixture tight to the ceiling.

#### **Functions**

- Built in light sensor for light dependent switching, dimming and controlling scenes.
- Built in temperature sensor for integration within home automation systems.

#### **Sensor Details**

 Integrated LED feedback and integrated LED nightlight. 360° range horizontal, 90° range vertical.

#### **Electrical / Sensor Protocol**

- · Power consumption of only 10mA via KNX buspower.
- Compatible with Crestron and Lutron HomeWorks QS
- KNX integrated BCU.

#### **Sensor Ordering Codes**

- · 0180-02 white sensor
- · 0180-03 black sensor

Sensor must be ordered through authorized Basalte dealer

#### Listings

- CE Certified
- · Class 2

# CE basalte

#### **ORDERING INFORMATION**

SERIES NO.	TRIM FINISH	LOUVER FINISH	SENSOR TYPE
AP76		/ <u> </u>	- AU
AP76 - Multisensor trimless	WH - white powder coat BL - black powder coat CC - custom color*  *Consult factory for options / details	WH - white powder coat NA - natural anodized BA - black anodized TI - titan anodized GO - gold anodized BR - bronze anodized GM - gun metal anodized RG - rose gold anodized	AU - Basalte Auro
ORDERING EXAMP	LE AP76-WH/WH-AU		



Project:	Туре:		USA/INT'L
----------	-------	--	-----------

### **Basalte Sensor Ordering Codes**

Basalte Order Code	0180-01	0180-02	0180-22	0180-23	0180-12	0180-13
integrates with	KNX	KNX	Crestron	Crestron	Lutron HQS*	Lutron HQS*
finish	white	black	white	black	white	black
motion sensor	yes	yes	yes	yes	yes	yes
temperature sensor	yes	yes	yes	yes	no	no
lux sensor	yes	no	yes	no	no	no
monochrome white LED	yes	yes	yes	yes	yes	yes

<sup>\*</sup>requires Serial.link integration module (0910-02)

Contact Basalte for local availability.

To connect with your installer or for detailed product specifications: info@basalte.be | +32 9 385 78 38 | +1 646 461 2190