
NEW

GEA FRAME ADJ IP40 - XS 230Vac

IP40 IK06

TIPOLOGIA / *TYPOLOGY*	**Incasso** / *Recessed*
POSIZIONE INSTALLATIVA / *INSTALLATION POSITION*	**A soffitto** / *Ceiling mounting*
AMBIENTE INSTALLATIVO / *INSTALLATION LOCATION*	**Interno** / *Indoor*



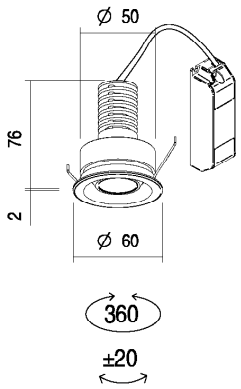

GEA **FRAME ADJ IP40 - XS 230Vac**

7W

kg 0,217

52 mm

NEW

GEA FRAME ADJ IP40 - XS 230Vac

CARATTERISTICHE ELETTRICHE | *ELECTRICAL FEATURES*

POTENZA ASSORBITA	*POWER CONSUMPTION*	**7W**
ALIMENTAZIONE	*POWER SUPPLY*	**230Vac**
FREQUENZA	*FREQUENCY*	**50/60 Hz**
ALIMENTATORE	*POWER SUPPLY UNIT*	**Incluso**	*Included*
COLLEGAMENTO	*CONNECTION*	**Tensione di rete**	*Mains voltage*

CARATTERISTICHE ILLUMINOTECNICHE | *LIGHTING FEATURES*

COLORE LED	*LED COLOUR*	**2700K, 3000K, 4000K**
INDICE RESA CROMATICA CRI	*CRI*	**>90** (2700K, 3000K, 4000K)
BINNING	**3 step MacAdam**	*3 MacAdam steps*
OTTICHE	*OPTICS*	**10°, 36°, 60°**
UGR	**<19**
FLUSSO REALE EMESSO - 3000K *REAL OUTPUT FLUX*	**7W 408lm 36°**
DURATA MEDIA LED	*AVERAGE LED LIFE*	**50.000h L80 B10**

CARATTERISTICHE MECCANICHE | *MECHANICAL FEATURES*

PESO	*WEIGHT*	**Kg 0,217**
FINITURE	*FINISHES*	**Bianco txt , Grigio txt, Nero txt** txt White, txt Grey, txt Black
INSTALLAZIONE	*INSTALLATION*	**A incasso su cartongesso o legno tramite molle (incluse), a incasso su muratura con cassaforma (non inclusa) e molle (incluse)** *Recessed on plasterboard or wood with springs (included), on brickwork with housing box (not included) and springs (included)*
MATERIALE	*MATERIAL*	**Corpo in alluminio verniciato con cornice, lente in PMMA** *Varnished aluminium body with frame, PMMA lens*

CARATTERISTICHE GENERALI | *GENERAL FEATURES*


TEMPERATURA DI ESERCIZIO *OPERATING TEMPERATURE*	**-10°C +45°C**
GRADO DI PROTEZIONE	*INGRESS PROTECTION*	**IP40**
GRADO DI RESISTENZA	*IMPACT RESISTANCE*	**IK06**
GLOW WIRE TEST	*GLOW WIRE TEST*	**960°C**
TEMPERATURA SCHERMO *SCREEN TEMPERATURE*	**40° @ Ta = 25°**
CLASSE DI ISOLAMENTO	*APPLIANCE CLASS*	**II**
CALPESTABILE	*WALKOVER*	**No**
CARRABILE	*DRIVE OVER*	**No**
SICUREZZA STANDARD	*STANDARD SAFETY*	*/*
SICUREZZA FOTOBIOLOGICA *PHOTOBIOLOGICAL SAFETY*	**GR1**

NEW

GEA FRAME ADJ IP40 - XS 230Vac

ACCESSORI | *ACCESSORIES*

CODICE / *CODE*	**CMGI20**	
TIPOLOGIA / *TYPOLOGY*	**Cassaforma** *Housing box*	kg 2,20
MATERIALE I *MATERIAL*	**Acciaio inox e alluminio** *Stainless steel and aluminium*	



FILTRI | *FILTER*

CODICE / *CODE*	**HC**
TIPOLOGIA / *TYPOLOGY*	**Filtro Honeycomb** *Honeycomb filter*

