


# Technical Data Sheet

Last data update


8/5/2017

9010  
novantadieci®

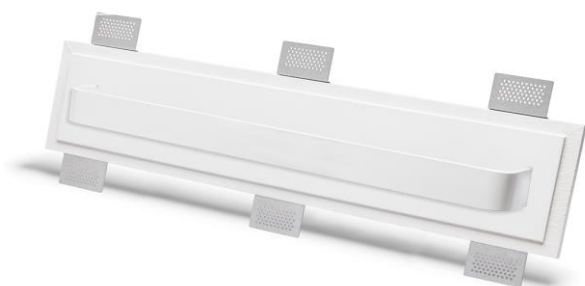


*Base*

600mm



*Height*

40mm



*Depth*

50mm

*Req. space behind the plasterboard*

50mm

*hole on the plasterboard*

705x145mm



*External measures*

700x140mm



**General notes**

## INCASSO DA PARETE

2485C-3003

Recessed Wall lamp / CRISTALY + ALUMITE

Surface finish : CRISTALY

LED 14,5W / 24Vdc / 1650lm / 3000°K / CRI85

### Model

Code	2485C
Product family	INCASSO DA PARETE
Type	Recessed Wall lamp

### Material/Surface finish

Code	004
Material	CRISTALY + ALUMITE
Surface finish	CRISTALY

### Electrical part

Code	3003
Type	LED
Power	14,5W
Tension	24Vdc
Light Output	1650lm
Colour Temperature	3000°K
CRI	85
Light Output of the lamp	1155lm
Dimmable	SI
Power Supply	by Remote Power Supply
Connection	Screw Terminal
Cover	

### General Data

Protection Index	IP20
Isolation Class	III
Weight [Kg]	5,6
Country of production	MADE IN ITALY
Mounting instruction	025.585_9010

### Installation

Multisize system	SI
Position	Wall Lamp

### Packaging


Type	White american Box
Measures AxBxH	760x240x210mm
Gross Weight [Kg]	6,3852
Master carton	NO
Quantity of articles	
Measures AxBxH	

# Technical Data Sheet

2485C-3003

9010  
novantadieci®

## Fotometric Data

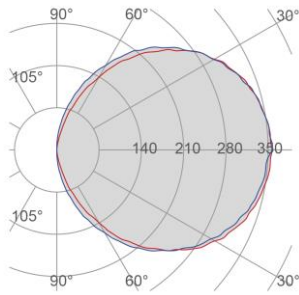

<i>Electrical part</i>	3003_14,5
<i>Power</i>	14,5W
<i>Light Output</i>	1650lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	70%
<i>Light Output of the lamp</i>	1155lm
<i>Beam Angle</i>	115°
<i>Beam Inclination</i>	

## Illuminance


## Accessories

### Housing Box for Brickwork



<i>Code</i>	023.4005
<i>Measures</i>	705X145X80mm
<i>Measures of the hole on</i>	735X175X90mm


## Standard Power Supply




<i>Code</i>	026.259
<i>Measures</i>	167x45x30mm
<i>Power</i>	36W
<i>Input</i>	220-240V~W
<i>Output</i>	24Vdc



<i>Code</i>	026.260
<i>Measures</i>	157x54x36mm
<i>Power</i>	60W
<i>Input</i>	220-240V~W
<i>Output</i>	24Vdc




<i>Code</i>	026.261
<i>Measures</i>	219x63x35.5mm
<i>Power</i>	150W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc




<i>Code</i>	026.262
<i>Measures</i>	244x71x35.5mm
<i>Power</i>	240W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc


## Dimmable Power Supply




<i>Code</i>	026.219
<i>Measures</i>	155x51x26mm
<i>Power</i>	21,6W
<i>Input</i>	220-240V~W
<i>Output</i>	24Vdc
<i>Dimmable</i>	PUSH/0-10V/DALI



<i>Code</i>	026.209
<i>Measures</i>	125x82x29mm
<i>Power</i>	60W
<i>Input</i>	220-240 V~W
<i>Output</i>	24Vdc
<i>Dimmable</i>	PUSH/1-10V



<i>Code</i>	026.190+026.261
<i>Measures</i>	156x52x24mm
<i>Power</i>	150W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc
<i>Dimmable</i>	PUSH/0-10V/DALI



<i>Code</i>	026.190+026.262
<i>Measures</i>	156x52x24mm
<i>Power</i>	240W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc
<i>Dimmable</i>	PUSH/0-10V/DALI

# Technical Data Sheet

2485C-3003

9010  
novantadieci®

---

## Accessories

---

### Other Accessories

---



<i>Code</i>	099.142
<i>Description</i>	Emergency Kit
<i>Notes</i>	