


# Technical Data Sheet

Last data update


3/15/2016

9010  
novantadieci®

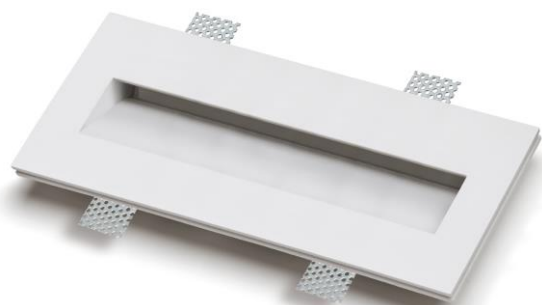


*Req. space behind the plasterboard*

50mm



*hole on the plasterboard*

305x115mm




*External measures*

300x110mm




*Measures of the light output*

250x40mm



*Height without electrical part*

40mm



*Height including the electrical part*

40mm

## Notes on measures

## General notes

## PASSO

4156-2704

Recessed Spotlight / CRISTALY

Surface finish : CRISTALY

LED 5.5W / 24Vdc / 475lm / 2700°K / CRI85

## Model

Code	4156
Product family	PASSO
Type	Recessed Spotlight

## Material/Surface finish

Code	004
Material	CRISTALY
Surface finish	CRISTALY

## Electrical part

Code	2704
Type	LED
Power	5.5W
Tension	24Vdc
Light Output	475lm
Colour Temperature	2700°K
CRI	85
Light Output of the lamp	394,25lm
Dimmable	SI
Power Supply	by Remote Power Supply
Connection	2 PVC cables
Cover	Transparent Polycarbonate

## General Data

Protection Index	IP20
Isolation Class	III
Weight [Kg]	1,2
Country of production	MADE IN ITALY
Mounting instruction	025.333_9010_REV03

## Installation

Multisize system	NO
Position	Wall/Ceiling lighting

## Packaging


Type	White american Box
Measures AxBxH	339x176x81mm
Gross Weight [Kg]	1,2991
Master carton	NO
Quantity of articles	
Measures AxBxH	

# Technical Data Sheet

4156-2704

9010  
novantadieci®

## Fotometric Data

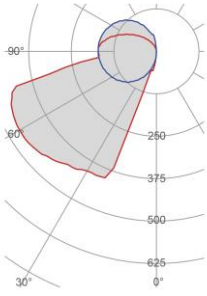


<i>Electrical part</i>	2704_5,5
<i>Power</i>	5.5W
<i>Light Output</i>	475lm
<i>Colour Temperature</i>	2700°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	83%
<i>Light Output of the lamp</i>	394,25lm
<i>Beam Angle</i>	63°
<i>Beam Inclination</i>	50°

<i>Illuminance</i>	0.3m	2033lux
	0.5m	732lux
	1m	183lux


## Accessories

### Housing Box for Brickwork




*Code* 023.422  
*Measures* 305X115X50mm  
*Measures of the hole on* 335X145X60mm

## Standard Power Supply




*Code* 026.258  
*Measures* 130x42x23mm  
*Power* 12W  
*Input* 220-240V~W  
*Output* 24Vdc




*Code* 026.259  
*Measures* 167x45x30mm  
*Power* 36W  
*Input* 220-240V~W  
*Output* 24Vdc



*Code* 026.260  
*Measures* 157x54x36mm  
*Power* 60W  
*Input* 220-240V~W  
*Output* 24Vdc




*Code* 026.261  
*Measures* 219x63x35.5mm  
*Power* 150W  
*Input* 180-295V~W  
*Output* 24Vdc




*Code* 026.262  
*Measures* 244x71x35.5mm  
*Power* 240W  
*Input* 180-295V~W  
*Output* 24Vdc

## Accessories


### Dimmable Power Supply




Code 026.219  
 Measures 155x51x26mm  
 Power 21,6W  
 Input 220-240V~W  
 Output 24Vdc  
 Dimmable PUSH/0-10V/DALI



Code 026.209  
 Measures 125x82x29mm  
 Power 60W  
 Input 220-240 V~W  
 Output 24Vdc  
 Dimmable PUSH/1-10V




Code 026.190+026.261  
 Measures 156x52x24mm  
 Power 150W  
 Input 180-295V~W  
 Output 24Vdc  
 Dimmable PUSH/0-10V/DALI



Code 026.190+026.262  
 Measures 156x52x24mm  
 Power 240W  
 Input 180-295V~W  
 Output 24Vdc  
 Dimmable PUSH/0-10V/DALI

### Other Accessories



Code 099.142  
 Description Emergency Kit  
 Notes