

# TECHNICAL DATA SHEET


## 200CENT ROUND 2x500LM TWIN ADJ TRIMLESS IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable 0° - 25°

114x244 mm - h = 100 mm

Material: CALCYT® plaster

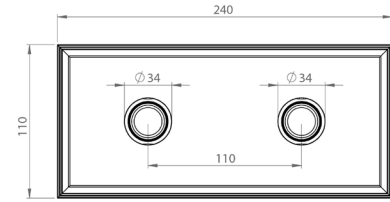

### Ref N° 200 BL CR



Black Chrome - Nero Cromo  
Schwarz Chrom - Zwart Chrom  
Noir Chrome - Negro Cromo

Ask for a bespoke solution or your favorite RAL color

Chiedere una soluzione personalizzata con il vostro colore RAL preferito

Fragen Sie nach einer individuellen Lösung oder Ihrer Lieblings-RAL-Farbe

Vraag om een niet standaard afwerking of je favoriete RAL kleur


Demandez une solution sur mesure ou votre couleur RAL préférée

Solicite una solución a medida o su color favorito de la carta RAL

### 200CENT ROUND TWIN ADJ 2x500LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 532 28 530	REF N° 532 28 930	REF N° 532 28 830	REF N° 532 28 730

2x5,9W - 2x500LM - 2 step MacAdam - **A+**  
Serial wiring - - - -   
Requires remote LED driver - 700mA  
Standard Perfectbeam 24° - Optional 44° beam  
Ultra low glare (UGR < 13)

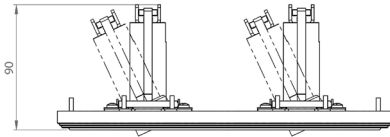

### Ref N° 200 BL BL




Black Black - Nero Nero  
Schwarz Schwarz - Zwart Zwart  
Noir Noir - Negro Negro

### Ref N° 200 WH BL



White Black - Bianco Nero  
Weiß Schwarz - Wit Zwart  
Blanc Noir - Bianco Negro

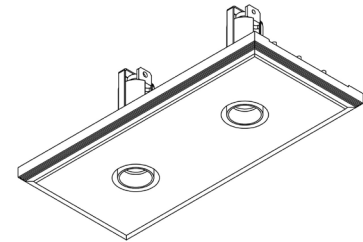

### INSTALLATION KIT

**STANDARD** (included) installation system for ceiling 9 - 12 - 15 mm  
**REF N° 200 99 025** installation system for gypsum ceiling 25 mm  
**REF N° 200 99 030** installation system for gypsum ceiling 30 mm  
**REF N° 856 00 000** Concrete box 200Cent Twin - Galvanized steel

### Ref N° 200 BL WH



Black White - Nero Bianco  
Schwarz Weiß - Zwart Wit  
Noir Blanc - Negro Bianco

### Ref N° 200 WH WH



White White - Bianco Bianco  
Weiß Weiß - Wit Wit  
Blanc Blanc - Bianco Bianco

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 32W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz - - current controlled  
 - - IP20 - 700mA - not dimmable

### Ref N° 200 BL GO



Black Gold - Nero Oro  
Schwarz Gold - Zwart Goud  
Noir Or - Negro Oro

### Ref N° 200 WH GO



White Gold - Bianco Oro  
Weiß Gold - Wit Goud  
Blanc Or - Bianco Oro

### REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max. 60W

1-10V DALI PUSH


REF N° 697 30 015 min 2W max 20W DALI

REF N° 697 60 015 min 2W max 20W 1-10V PUSH

REF N° 697 77 010 min 2W max 10W PHASE DIM

REF N° 697 77 020 min 11W max 20W PHASE DIM

230V/50Hz - - current controlled  
 - - IP20 - 700mA - dimmable



### BEAM ANGLES

**STANDARD** (included) beam angle 24°  
**REF N° 203 20 044** (option) beam angle 44°