

TECHNICAL DATA SHEET




200CENT SQUARE 500LM FIX TRIM IP54

BATHROOM - STANZA DA BAGNO - BADEZIMMER - BADKAMER - SALLE DE BAINS - CUARTO DE BAÑO

Fix (not adjustable) 0° - 0°

Ø32 mm - h = 95 mm

Material : Aluminium

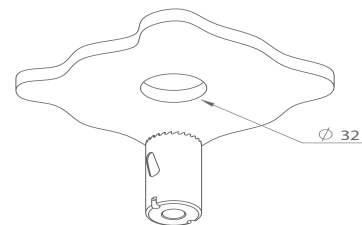

REF N° 200 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro



REF N° 200 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco

200CENT SQUARE IP54 500LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 526 28 531	REF N° 526 28 931	REF N° 526 28 831	REF N° 526 28 731

5,9 W - 500lm - 2 Step MacAdam - **A+**
Serial wiring - - **CE** - - -
Requires remote LED driver - 700mA
Perfect beam 24° - Ultra low glare (UGR < 13)

REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 32W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz - - current controlled
 - **CE** - IP20 - 700mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 040 min. 3W max. 60W
1-10V DALI PUSH

REF N° 697 77 010 min. 2W max. 10W PHASE DIM

REF N° 697 77 020 min. 11W max. 20W PHASE DIM

REF N° 697 30 015 min. 2W max. 20W DALI

REF N° 697 60 015 min. 2W max. 20W 1-10V PUSH

230V/50Hz - - current controlled
 - **CE** - IP20 - 700mA - dimmable

INSTALLATION KIT

REF N° 680 01 032 standard holesaw Ø32mm



BEAM ANGLES

STANDARD (included) beam angle 24°

