


adjustable plaster ring Ø108


installation instruction

1

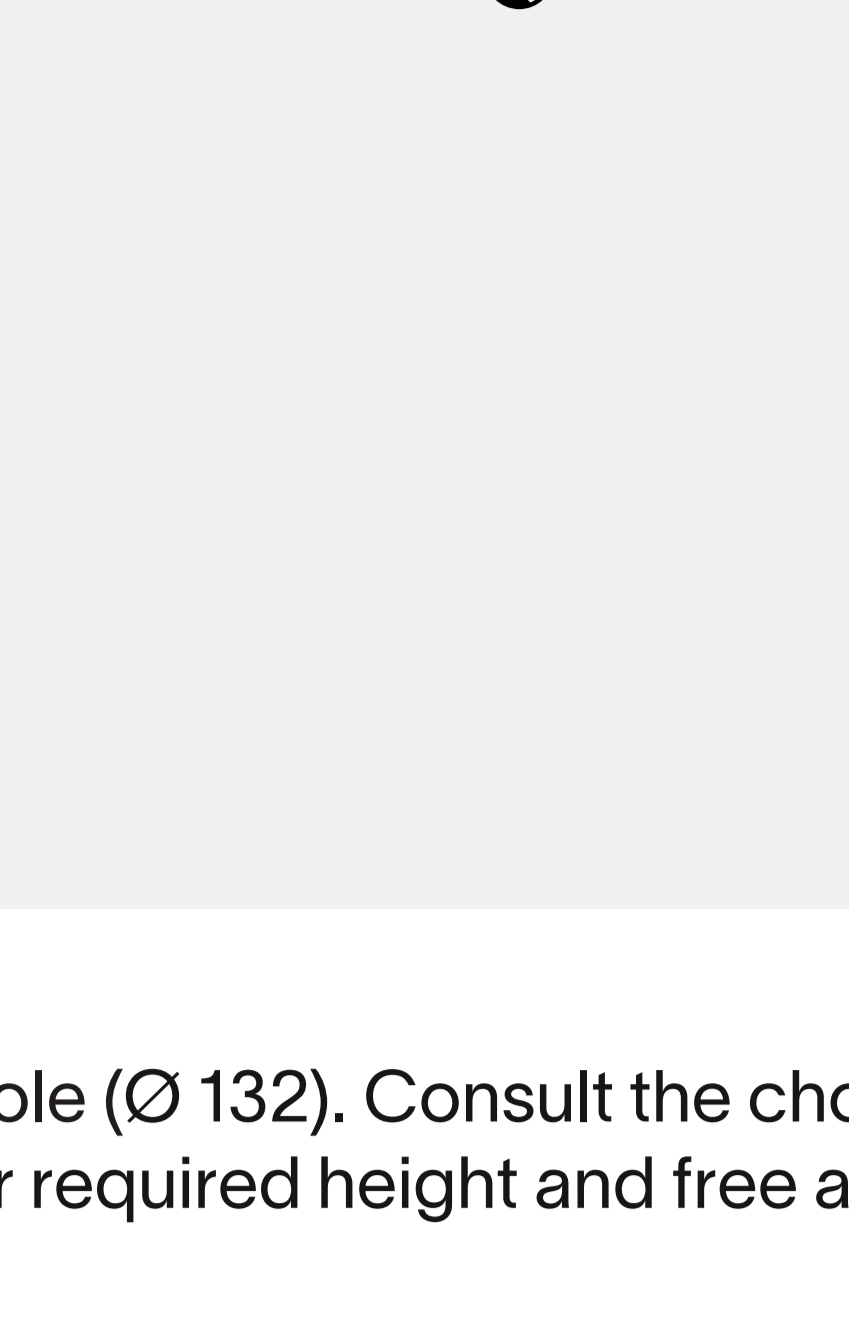

Cut a round hole (Ø 132). Consult the chosen luminaire tech specs for required height and free air dimensions.

2

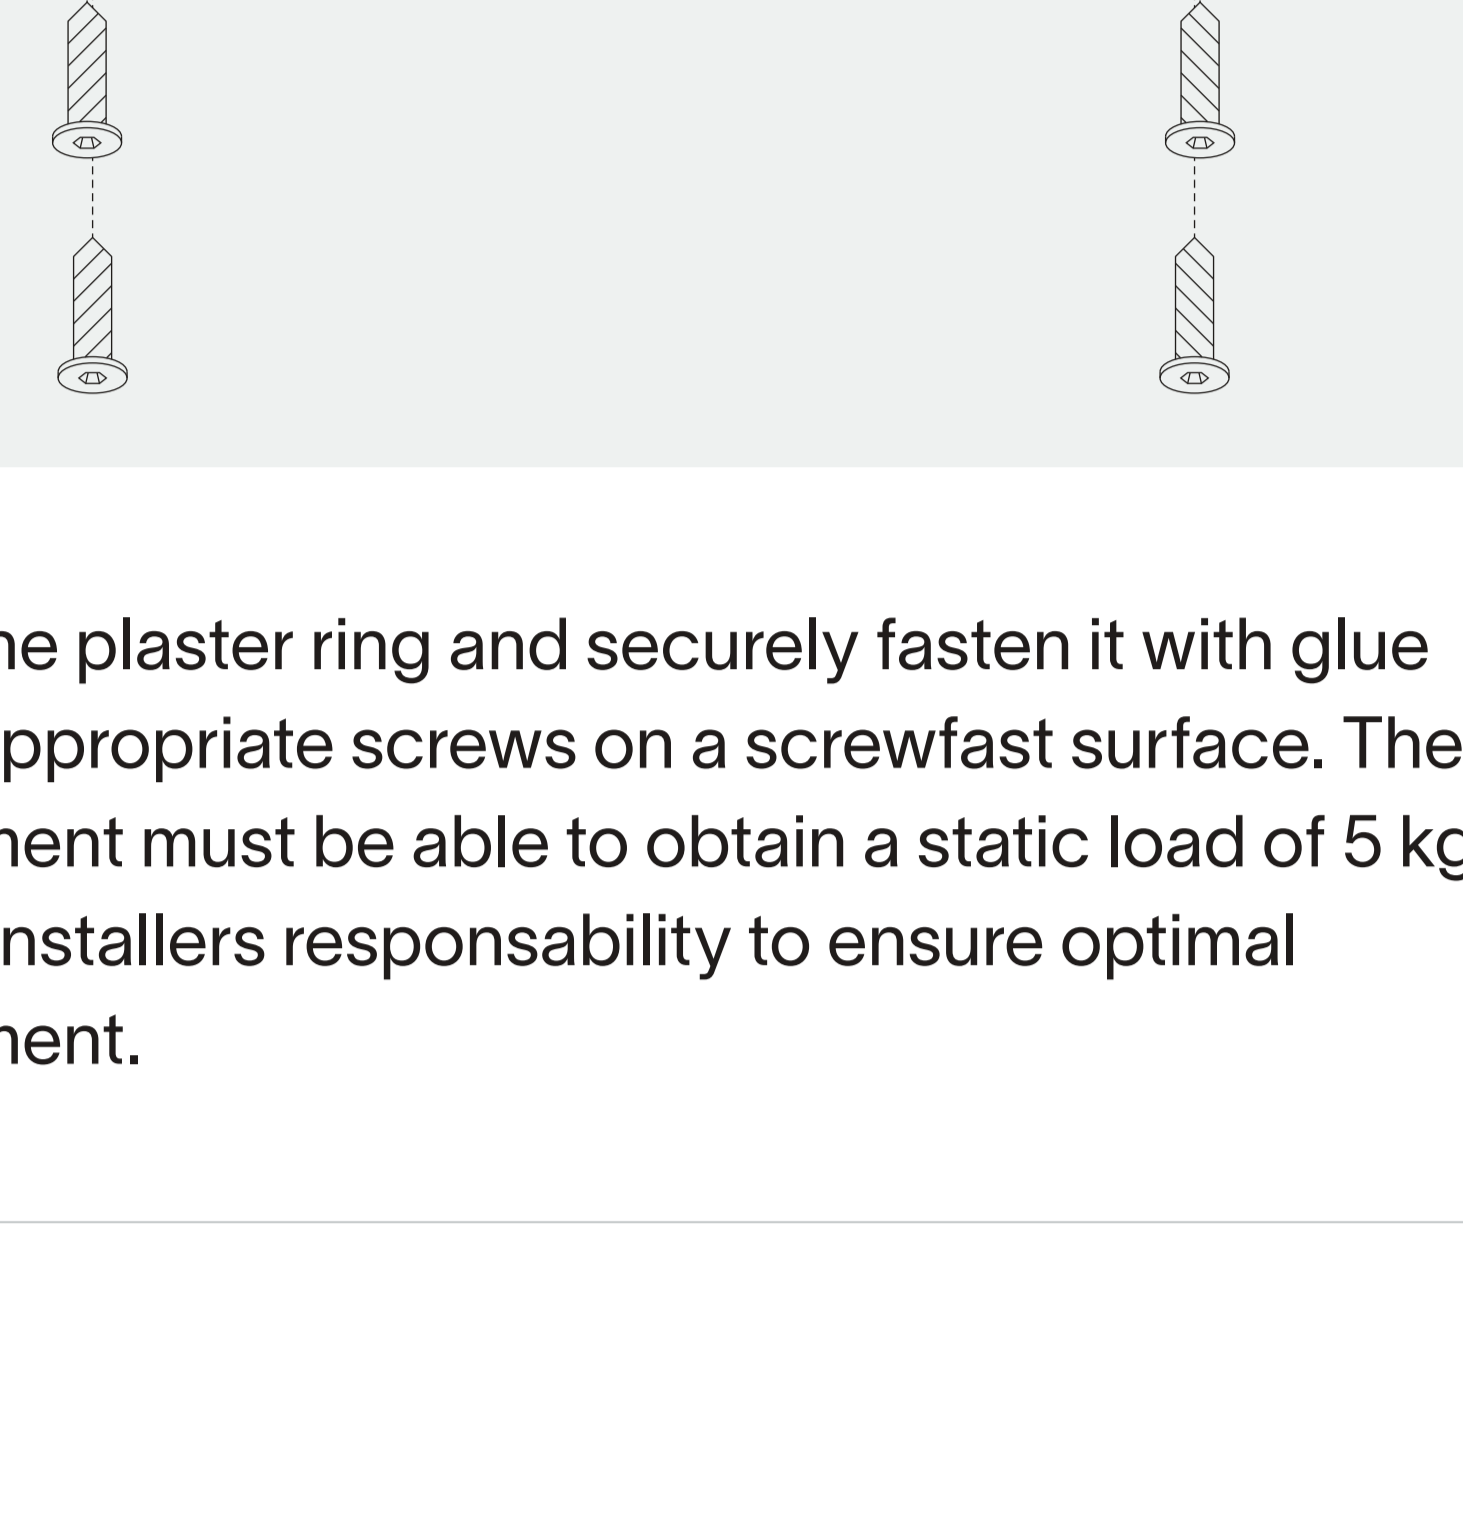

Insert the plaster ring and securely fasten it with glue or the appropriate screws on a screwfast surface. The attachment must be able to obtain a static load of 5 kg. It's the installers responsibility to ensure optimal attachment.


or



Slide the plaster ring through the Ø132 hole to install on top of the ceiling.


Securely fasten the plaster ring with the appropriate screws on a screwfast surface.

3





Adjust the height of the plaster ring by twisting the bottom part.

4

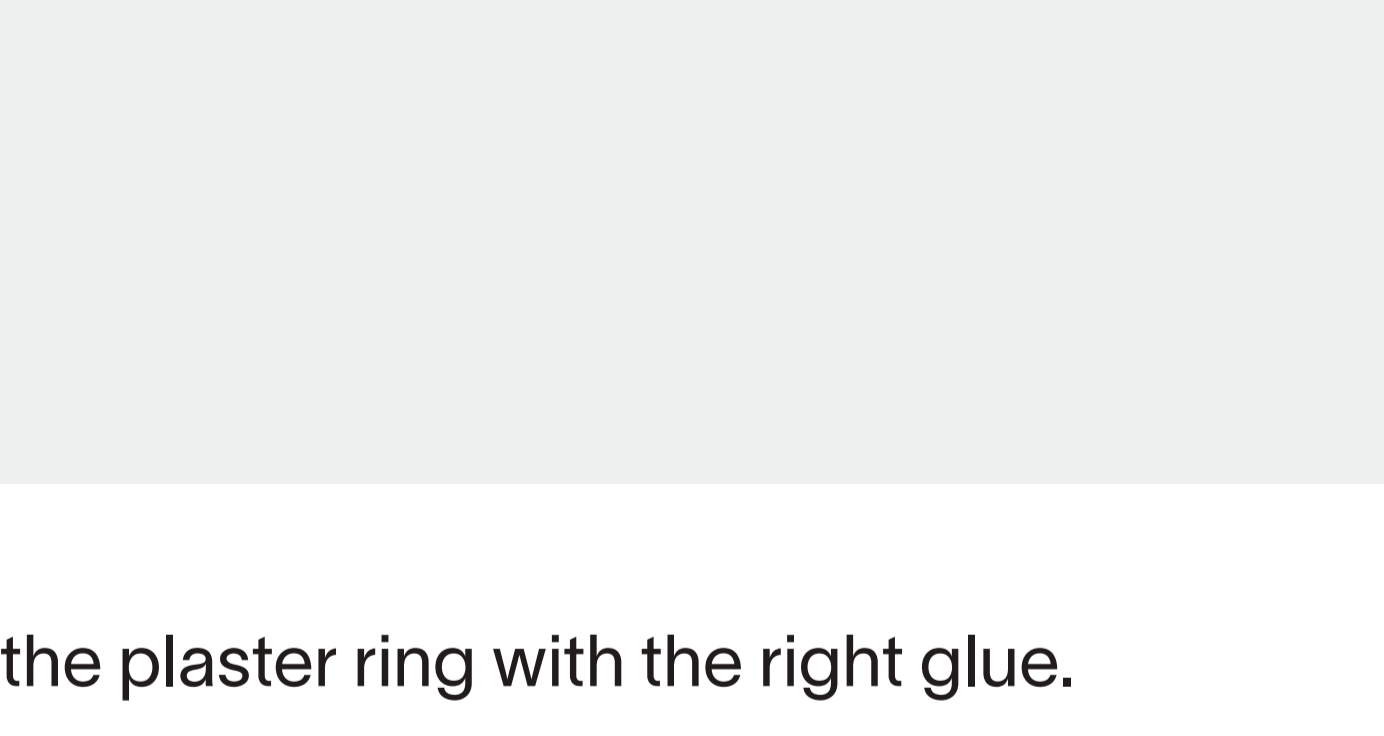


Lock the plaster ring with the right glue.

5

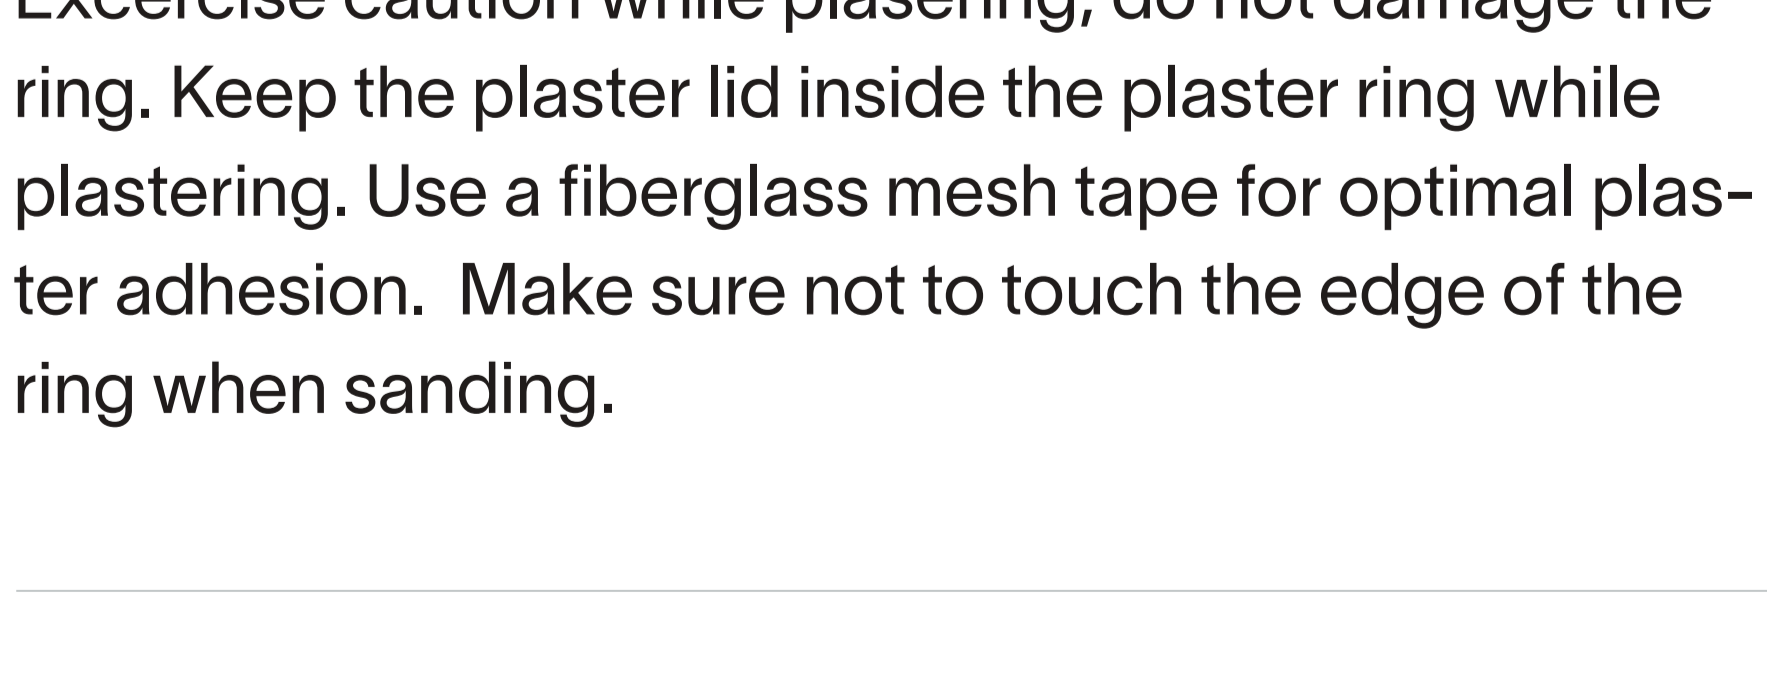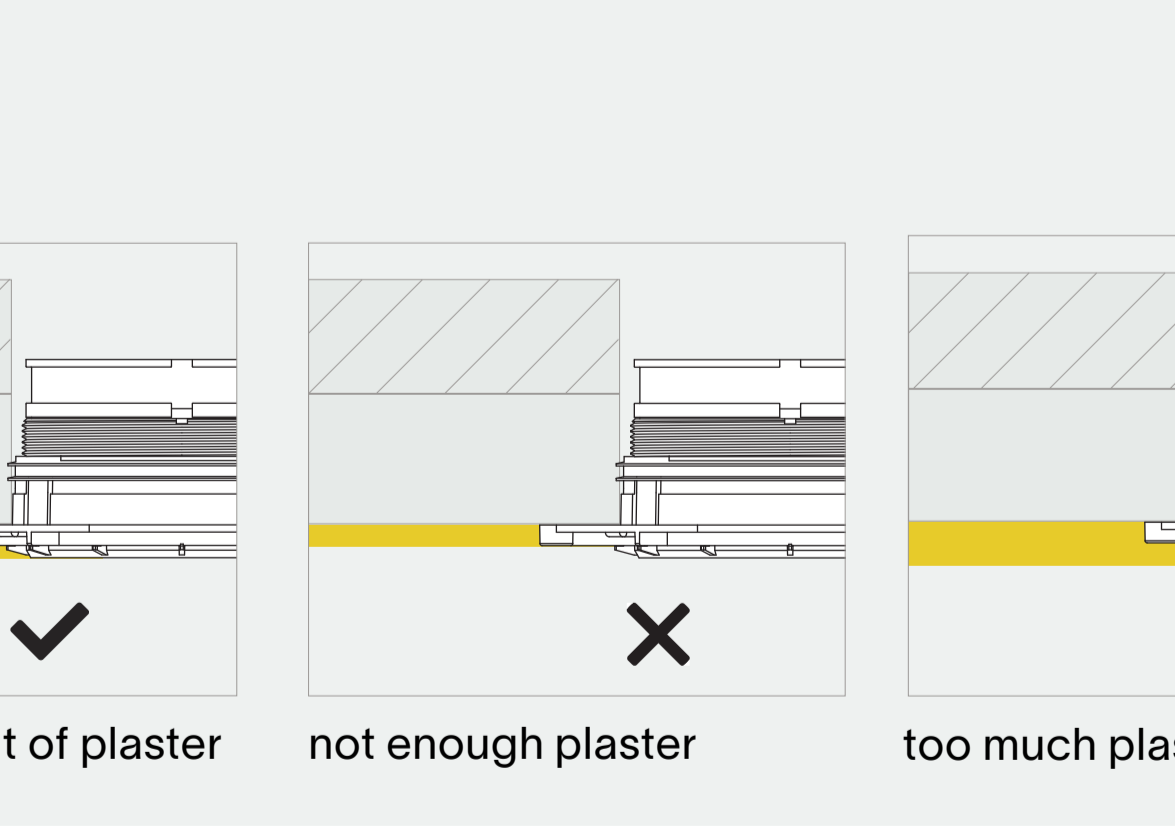

Excercise caution while plasing, do not damage the ring. Keep the plaster lid inside the plaster ring while plastering. Use a fiberglass mesh tape for optimal plaster adhesion. Make sure not to touch the edge of the ring when sanding.

6

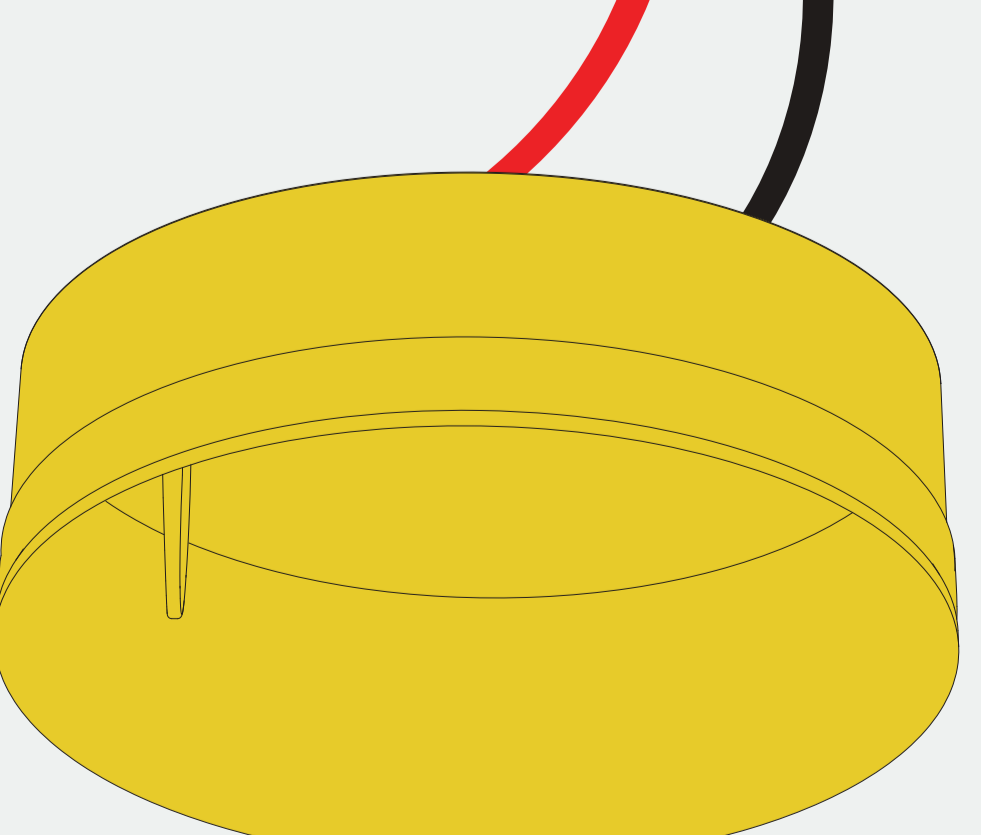

remove the yellow lid just before installing the fixture
thank you for choosing prado