

ALPS POGO

LED SEMI RECESSED SPOTLIGHT
TRUE COLOUR CRI 98 | REMOTE DRIVER

DLD
ARCHITECTURAL




DETAILS

Tilt	0-90°
Rotation	355°
IP Rating	IP20
Class	I
Standards	CE / ROHS
Fire Rated	60+ minutes
Material	Aluminium
Fixation	Surface mounted
Warranty	5 Years

KEY POINTS

- True Colour CRI 98, amazingly high level of colour rendering
- R9 95, reds are redder than ever
- Remote driver - can be mounted up to 30m away
- Dim to dark with our range of fully tested drivers

DIMENSIONS

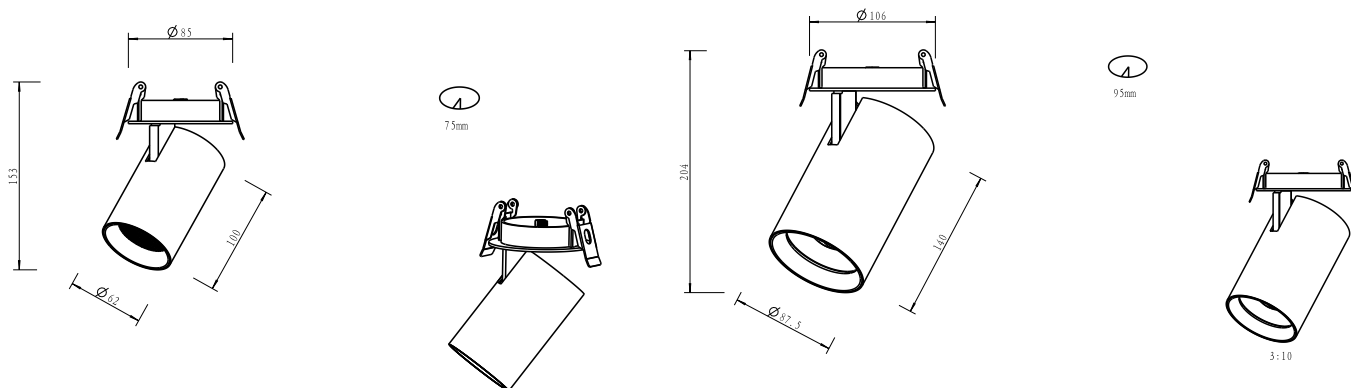

15W

Lens Diameter:	Ø62mm
Length:	100mm
Cutout:	Ø75mm

35W

Lens Diameter:	Ø87.5mm
Length:	140mm
Cutout:	Ø95mm

TRUE COLOUR CRI 98

ALPS POGO

LED SEMI RECESSED SPOTLIGHT
TRUE COLOUR CRI 98 | REMOTE DRIVER

DLD
ARCHITECTURAL

SPECIFICATION

Power	15W			25W			35W		
Beam Angle	15°	24°	36°	15°	24°	36°	15°	24°	36°
							40°	60°	
Binning SDCM	<3 Step								
CRI	98								
R9	95								
TM30 Rf Rg	Rf 95 Rg 95								
UGR	<19								
Cut-Off Angle	11° 16° 17°								
Lumen Output	1300 lm			2800 lm			3800 lm		
Efficiency	90 lm/W			90 lm/W			90 lm/W		
LED Type	Philips Lumileds COB LED								
LED Lifetime (Ave.)	50,000 hrs								
Voltage	220-240V								
Current	350mA								
Supported Protocols	Mains Dim / TRIAC / 0-10V / DALI								
Dim to Dark	0.1% Lux								
Wiring	N/A								
Product code	DLD/ALPSPOGO								



01189 889414



sales@darklightdesign.com



darklightdesign.com

Darklight Design
Unit 10 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH