


Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our
configurator, preview it in a virtual
room and augmented reality.




Table of contents

1. Product Overview	Page 2
2. Finishes & Materials	Page 2
3. Light Source & Dimming	Page 2
4. Functionality & Accessories	Page 3
5. Photometric Data & Technical Information	Page 3
6. Installation	Page 4
7. Recommended Use & Installation Height	Page 4
8. Ordering Codes	Page 5
9. Certifications & Standards	Page 9
10. Maintenance & Cleaning	Page 9

Versions



Single
Page 5



Multiple
Page 6-8

Volta

suspension lamp

1. Product Overview

Suspension lamp with cylindrical aluminium head and acrylic (PMMA) lens diffuser.
Optional embedded aluminium optic lens with a 30° beam angle.
Height adjustable, with the possibility to create different compositions.



2. Finishes & Materials



Body & Head: 26 Black
26 Black & 61 Satin Gold

Canopy: 26 Black
74 White

PVC extra-thin electrical cable:
Black on all finishes.

3. Light Source & Dimming

Lamping per head
LED 6.2W (Ang. 60° / >90 CRI / 350mA) 120V
2700K / Typ* 725 lumens
3000K / Typ* 763 lumens
*Integrated LED module (included).

Dimming options:
Single: Non dimmable (dimmable upon request)
Compositions: Dimmable Triac

Optional optic lens: embedded aluminium optic lens 30°.

Volta

suspension lamp

4. Functionality & Accessories

Two possible optic lenses

Standard configuration provides acrylic optic. It provides diffused uniform illumination and it is visible as a decorative light line when seen from the side. 60° beam angle.

Optional architectural optic conceals the LED source within a conical aluminium lens. It projects light exclusively downward (no lateral emission). 30° beam angle.



Standard
Acrylic optic lens
60° beam angle




Optional
Optic lens
30° beam angle

5. Photometric Data & Technical Information


Photometric data corresponds to the output of each individual head. Access to photometric files in download area.

2D / 3D / BIM Files available. Access to files in download area here.

Optic lens 60°



Optic lens 30°



Volta

suspension lamp

6. Installation

Single canopy

Clusters

Surface

Linear





7. Recommended Use & Installation Height

Suitable for general lighting, as well as for direct illumination above dining tables, countertops, bars, or desks.

We recommend positioning the light source approximately 33" above the surface. For more accurate information, refer to the photometric report.


Standard Acrylic Lens

Embedded Aluminium Lens

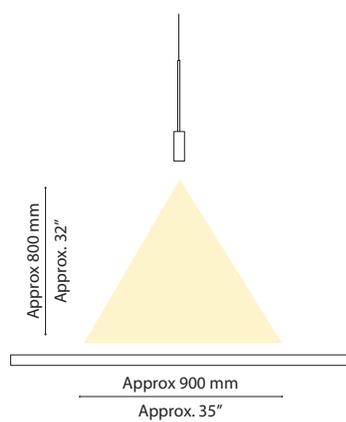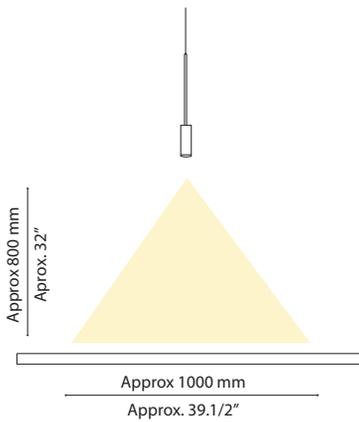

Volta

suspension lamp



Configurator.estiluz.com
 Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping 3534S

LED 6.2W (Ang. 60° / >90 CRI / 350mA) 120V

2700K / Typ* 725 lumens

3000K / Typ* 763 lumens

*Integrated LED module (included).

DIM: Non dimmable (dimmable upon request)

Optional optic lens: embedded aluminium
 optic lens 30°.

Canopy: Single Surface

Finishes

Body & Head:

26 Black & 61 Satin Gold


26 Black

Canopy:

26 Black

74 White

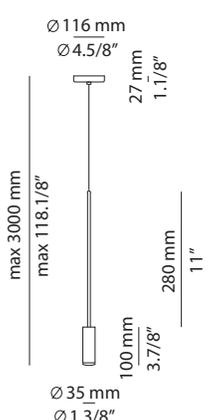

Drawing	Finish Canopy	Finish Body / Head	Ordering Code	Ordering Code
			2700K	3000K
VOL_3534S 	Black	Black / Black	VOL_3534S_262626W	VOL_3534S_262626M
	White	Black / Black	VOL_3534S_742626W	VOL_3534S_742626M
	Black	Black / Satin Gold	VOL_3534S_262661W	VOL_3534S_262661M
	White	Black / Satin Gold	VOL_3534S_742661W	VOL_3534S_742661M


Lens Ordering Codes:

One 30° embedded lens per head

Black	1 unit of 123530263
Satin Gold	1 unit of 123530613

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping L73S3S

LED 3x6.2W (Ang. 60° / >90 CRI / 350mA) 120V

2700K / Typ* 3x725 lumens

3000K / Typ* 3x763 lumens

*Integrated LED module (included).

DIM: Dimmable Triac

Optional optic lens: embedded aluminium
optic lens 30°.

Canopy: Multiple Surface

Finishes

Body & Head:


26 Black & 61 Satin Gold

26 Black

Canopy:

26 Black

74 White




Drawing	Finish Canopy	Finish Body / Head	Ordering Code	Ordering Code
			2700K	3000K
VOL_L73S3S 	Black	Black / Black	VOL_L73S3S_262626W	VOL_L73S3S_262626M
	White	Black / Black	VOL_L73S3S_742626W	VOL_L73S3S_742626M
	Black	Black / Satin Gold	VOL_L73S3S_262661W	VOL_L73S3S_262661M
	White	Black / Satin Gold	VOL_L73S3S_742661W	VOL_L73S3S_742661M

Lens Ordering Codes:

One 30° embedded lens per head	Black	3 units of 123530263
	Satin Gold	3 units of 123530613

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping L92S4S

LED 4x6.2W (Ang. 60° / >90 CRI / 350mA) 120V

2700K / Typ* 4x725 lumens

3000K / Typ* 4x763 lumens

*Integrated LED module (included).

DIM: Dimmable Triac

Optional optic lens: embedded aluminium
optic lens 30°.

Canopy: Multiple Surface

Finishes

Body & Head:

26 Black & 61 Satin Gold

26 Black

Canopy:

26 Black

74 White




Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
<p>VOL_L92S4S</p>	Black	Black / Black	VOL_L92S4S_262626W	VOL_L92S4S_262626M
	White	Black / Black	VOL_L92S4S_742626W	VOL_L92S4S_742626M
	Black	Black / Satin Gold	VOL_L92S4S_262661W	VOL_L92S4S_262661M
	White	Black / Satin Gold	VOL_L92S4S_742661W	VOL_L92S4S_742661M

Lens Ordering Codes:

One 30° embedded lens per head	Black	4 units of 123530263
	Satin Gold	4 units of 123530613

Volta

suspension lamp



Configurator.estiluz.com
Customize your creation with our configurator, preview it in a virtual room and augmented reality.

8. Ordering Codes

Lamping L165S6S

LED 6x6.2W (Ang. 60° / >90 CRI / 350mA) 120V

2700K / Typ* 6x725 lumens

3000K / Typ* 6x763 lumens

*Integrated LED module (included).

DIM: Dimmable Triac

Optional optic lens: embedded aluminium optic lens 30°.

Canopy: Multiple Surface

Finishes

Body & Head:


26 Black & 61 Satin Gold

26 Black

Canopy:

26 Black

74 White



Drawing	Finish Canopy	Finish Body / Head	Ordering Code 2700K	Ordering Code 3000K
<p>max 3000 mm max 118.1/8"</p> <p>1647 mm 64.77/8"</p> <p>32.5 mm 1.31/2"</p> <p>110 mm 4.3/8"</p> <p>Ø 35 mm Ø 1.3/8"</p> <p>263 mm 10.3/8"</p>	Black	Black / Black	VOL_L165S6S_262626W	VOL_L165S6S_262626M
	White	Black / Black	VOL_L165S6S_742626W	VOL_L165S6S_742626M
	Black	Black / Satin Gold	VOL_L165S6S_262661W	VOL_L165S6S_262661M
	White	Black / Satin Gold	VOL_L165S6S_742661W	VOL_L165S6S_742661M

Lens Ordering Codes:

One 30° embedded lens per head	Black	6 units of 123530263
	Satin Gold	6 units of 123530613

Volta

suspension lamp

9. Certifications & Standards



Warranty: 1 year
100% made in Spain

Estiluz products are guaranteed against manufacturing defect for one year from date of delivery. Estiluz products with integral LED modules and drivers are guaranteed against manufacturing defects for five years from date of delivery. This guarantee is limited to replacement of defective material and does not include any labor, expenses or damages contingent or incidental thereto. This warranty does not apply to products damaged due to accident, tampering, misuse or abuse.

10. Maintenance & Cleaning

Our lighting fixtures are crafted with high-quality materials and finishes to ensure durability and timeless elegance. To maintain their original beauty, please follow these care recommendations:

1. Regular cleaning: Dust the fixture regularly using a soft, dry microfiber cloth to prevent buildup.
2. For deeper cleaning: If necessary, use a slightly damp cloth with clean water. Always dry the surface immediately with a dry cloth.
3. Avoid harsh products: Do not use alcohol, abrasive cleaners, solvents, or detergents, as they may damage the finish and alter the appearance.

In case of failure, LEDs can be easily replaced.