

HANGMAN - Pendant

INSTALLATION INSTRUCTIONS

CODE - RP-E-2105

Rakumba

REVISION 23.10.23 REVISED BY: JC



- ① Select your desired pendant orientation (refer to the hangman product brochure for some possible shape inspirations). You may wish to select an orientation that directs the light output in specific directions.




- ② Adjust the 4x swivels to move the pendant into the chosen orientation. Then hold up the pendant by the two suspension cables to check the balance - some positions require the cables be adjusted for balance.



- ③ Adjust the rubber rings so the cables exit the top side of the pendant and the pendant is balanced in equilibrium - examples below. The method for adjusting the rubber rings is explained in steps 4-6.

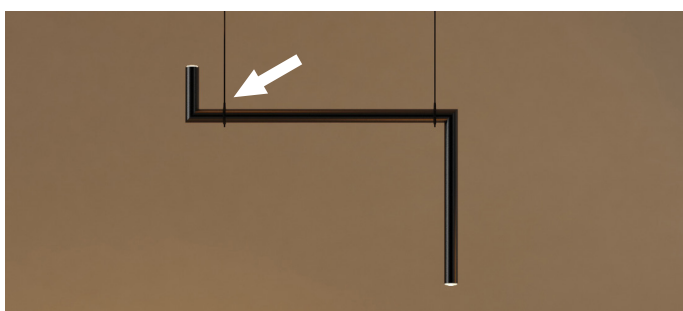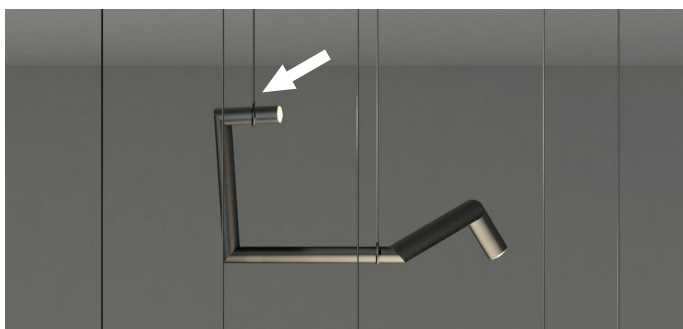

- ④ The 'dummy' cable rubber ring may **rotate around** and also **slide along** the pendant. The powered cable rubber ring can only **rotate around** the pendant, but does not slide along.

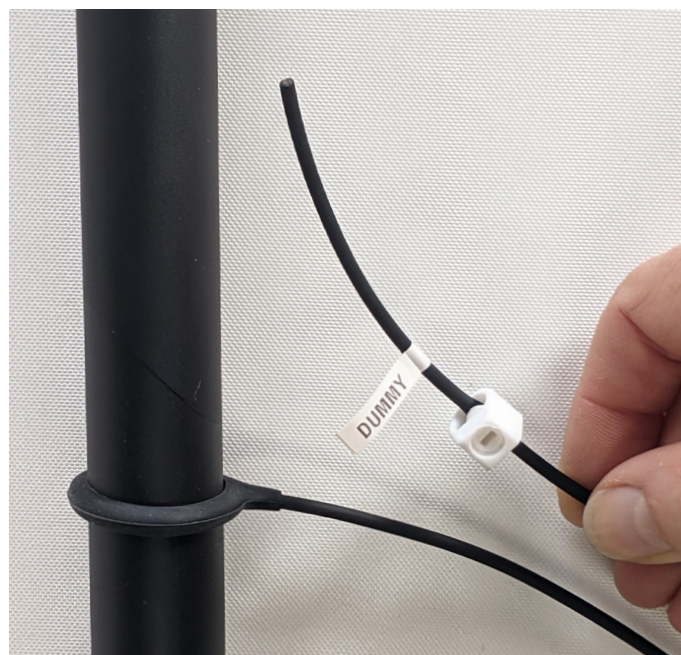

HANGMAN - Pendant

INSTALLATION INSTRUCTIONS


CODE - RP-E-2105

Rakumba


REVISION 23.10.23

REVISED BY: JC

- ⑤ Note: In many common orientations, the center segment typically faces either down or up. This does not require sliding the rings, but does require rotating them both around the pendant.

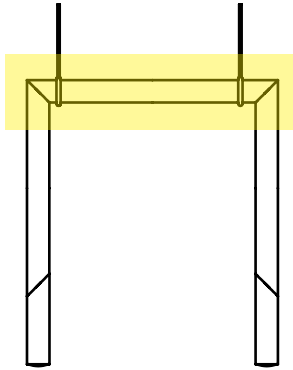

Central Extrusion
facing DOWN

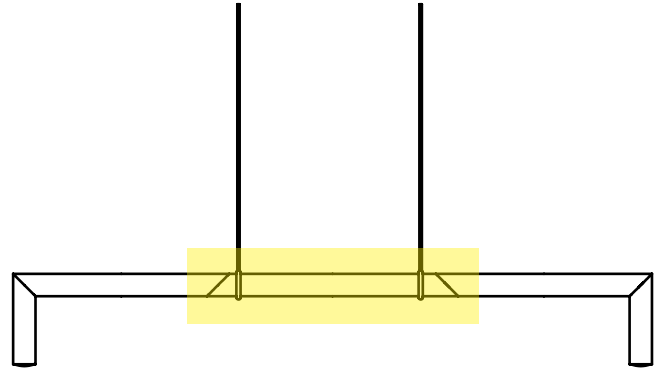

Central Extrusion
facing UP

- ⑥ To rotate the powered cable rubber ring, gently lift the rubber ring up off the cable and push or pull the cable through the ring until it faces the desired direction.



HANGMAN - Pendant

INSTALLATION INSTRUCTIONS


CODE - RP-E-2105

Rakumba

REVISION 23.10.23

REVISED BY: JC

- ⑦ Measure the horizontal distance between the cables after fully adjusting for balance. If no adjustment was required, the default distance (as supplied) is 190mm.

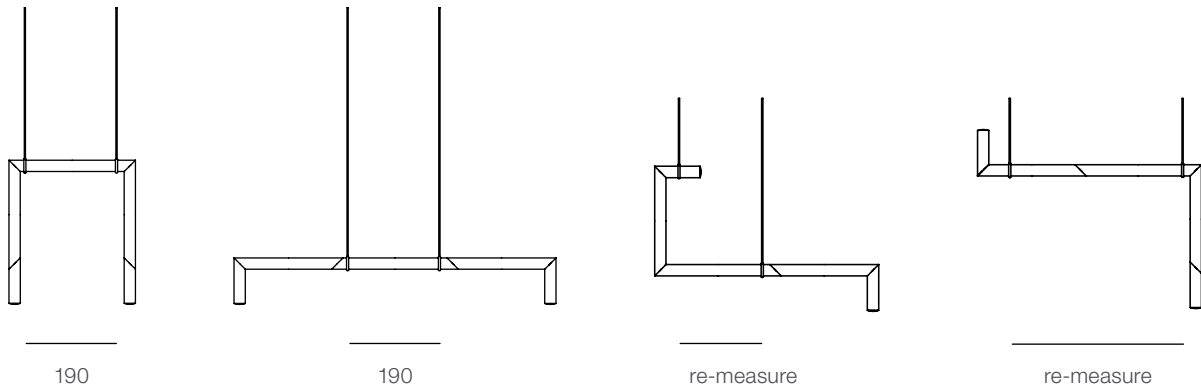

- ⑧ Install the canopies (and remote drivers) accounting for the measured distance. Refer to the Rakumba Seamless Canopy installation instructions supplied.

- ⑨ After assembly, use the supplied glove or a microfibre cloth to remove any fingerprints, marks or polishing residue.

